

CEOS-ARD Product Family Specification

Synthetic Aperture Radar

Normalised Radar Backscatter [NRB]
Polarimetric Radar [POL]
Ocean Radar Backscatter [ORB]
Geocoded Single-Look Complex [GSLC]
Interferometric Radar [INSAR]

.....

Version 1.2
April 2025

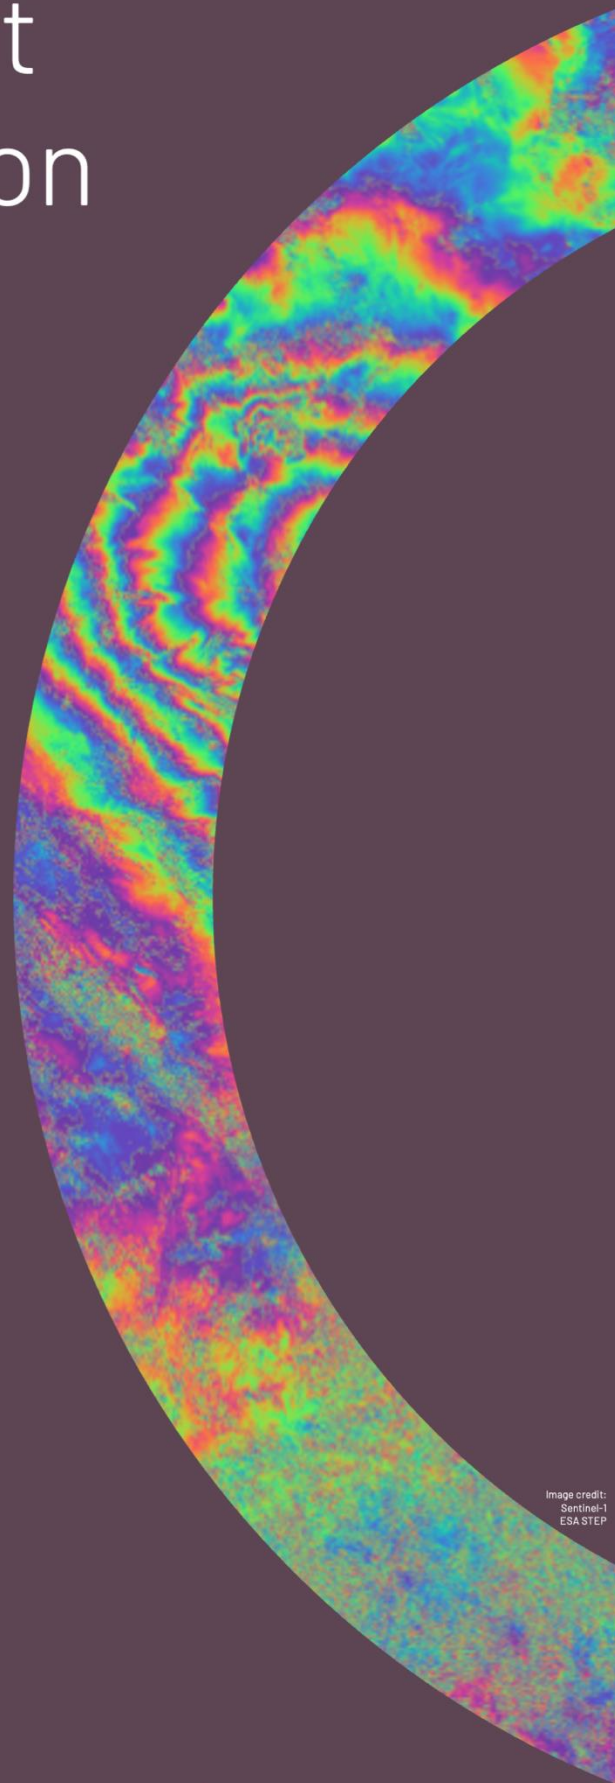


Image credit:
Sentinel-1
ESA STEP

Document Status

Product Family Specification, Synthetic Aperture Radar

Proposed revisions may be provided to: ard-contact@lists.ceos.org

Document History

Versio n	Date	Description of change	Affected CEOS- ARD product	Author
0.1	14-12-2022	Zero Draft based on the CARD4L NRB PFS v5.5, POL PFS 3.5, ORB PFS v1.0 and draft GSLC v0.1	-	Charbonneau Rosenqvist, Truckenbrodt, Small, Zhou, Albinet, Tadono, Chapman, Logan, Yuan, Repse, Dadamia, Lavalley, Miranda, Mayer, Kellndorfer, Valentino, Lewis, Pinheiro, Siqueira, Deschamps, Hajdich
0.2	13-02-2023	Reformat to CEOS-ARD PFS template. Change “CARD4L” to “CEOS-ARD” Change “Target” to “Goal”	-	Rosenqvist
0.3	29-07-2023	Refinement of GSLC specifications and alignment with NRB, POL and ORB parameters. Annex reorganisation and ORB and GSLC examples added	[GSLC]	Charbonneau, Zebker, Rosenqvist, Albinet, Small, Truckenbrodt
0.3.1	26-09-2023	New items 1.7.15 (Reference orbit) and 3.7 (Flattened Phase) added as Goal	[NRB] [POL]	Charbonneau
0.4	26-09-2023	Item 4.3 (Geometric accuracy). Clarification added to indicate whether absolute location accuracy (ALE) estimates refer to source data, ARD product, or both.	[NRB] [POL] [ORB] [GSLC]	Small, Chapman, Charbonneau, Rosenqvist, Albinet, Truckenbrodt

Versio n	Date	Description of change	Affected CEOS- ARD product	Author
0.4.1	11-10-2023	Add product code in summary table		Rosenqvist
1.0	11-10-2023	CEOS-ARD for SAR PFS – including Geocoded Single-Look Complex v1.0 – endorsed at LSI-VC-14		LSI-VC
1.0.1	17-05-2024	Item 1.6.7 (Source Data Image Attributes): Azimuth time sample interval [sec] added as alternative to Azimuth resolution [m].	[NRB] [POL] [ORB] [GSLC]	Charbonneau, Small, Chapman, Logan, Shiroma, Brancato
1.1	23-07-2024	CEOS-ARD for SAR PFS, update v1.1 endorsed at LSI-VC teleconference		LSI-VC
1.1.1	07-12-2023	Drafting InSAR product addition to PFS	[InSAR]	Charbonneau
1.1.2	10-07-2024	Completion of the InSAR addition	[InSAR]	Charbonneau, Rosenqvist, Small, De Zan, Brancato, Shiroma
1.2.0.1	02-04-2025	InSAR displacement addition and [InSAR] refinement	[InSAR]	Charbonneau, Garthwaite, Rosenqvist, De Zan, Chapman, Staniewicz, Shiroma, Truckenbrodt, Zhou
1.2	14-04-2025	CEOS-ARD for SAR PFS update 1.2 – including Interferometric Radar [InSAR] – endorsed at LSI-VC-17	[InSAR]	LSI-VC

Contributing Authors

François Charbonneau, Natural Resources Canada, Canada
Ake Rosenqvist, soloEO / Japan Aerospace Exploration Agency, Japan
John Truckenbrodt, German Aerospace Centre (DLR), Germany
Clément Albinet, European Space Agency (ESA), Italy
David Small, University of Zurich, Switzerland

Bruce Chapman, Jet Propulsion Laboratory, USA
Howard Zebker, Stanford University, USA
Zheng-Shu Zhou, CSIRO, Australia
David Bekaert, Jet Propulsion Laboratory, USA
Virginia Brancato, Jet Propulsion Laboratory, USA
Danilo Dadamia, CONAE, Argentina
Benjamin Deschamps, Environment and Climate Change, Canada
Matt Garthwaite, CSIRO, Australia
Guillaume Hajduch, Collecte Localisation Satellites, France
P.V. Jayasri, ISRO, India
Josef Kellndorfer, Earth Big Data, USA
Marco Lavallo, Jet Propulsion Laboratory, USA
Thomas Logan, Alaska Satellite Facility, USA
Franz Meyer, Alaska Satellite Facility, USA
Nuno Miranda, European Space Agency (ESA), Italy
Muriel Pinheiro, European Space Agency (ESA), Italy
Marko Repse, Sinergise, Slovenia
HariPriya Sakethapuram, ISRO, India
Gustavo H. X. Shiroma, Jet Propulsion Laboratory, USA
Andreia Siqueira, Geoscience Australia, Australia
Scott Staniewicz, Jet Propulsion Laboratory, USA
Takeo Tadono, Japan Aerospace Exploration Agency, Japan
Medhavy Thankappan, Geoscience Australia, Australia
Antonio Valentino, Starion *for* European Space Agency (ESA), Italy
Anna Wendleder, German Aerospace Centre (DLR), Germany
Fang Yuan, Digital Earth Africa, Australia
Francesco De Zan, Delta-Phi Remote Sensing GmbH, Germany

CEOS Analysis Ready Data Definition

“CEOS Analysis Ready Data (CEOS-ARD) are satellite data that have been processed to a minimum set of requirements and organised into a form that allows immediate analysis with a minimum of additional user effort and interoperability both through time and with other datasets.”

Description

Product Family Specification Title: Synthetic Aperture Radar (CEOS-ARD SAR)

Applies to: Data collected by Synthetic Aperture Radar sensors

Background to CEOS-ARD for Synthetic Aperture Radar

The CEOS Analysis Ready Data (CEOS-ARD) Product Family Specification (PFS) for Synthetic Aperture Radar (SAR) data is specifically aimed at users interested in exploring the potential of SAR but who may lack the expertise or facilities for SAR processing.

This CEOS-ARD for Synthetic Aperture Radar PFS incorporates, into a single generic document, the following five CEOS-ARD SAR specifications endorsed by CEOS Land Surface Imaging-Virtual Constellation (CEOS LSI-VC):

- Normalised Radar Backscatter [version 5.5]
- Polarimetric Radar [version 3.5]
- Ocean Radar Backscatter [version 1.0]
- Geocoded Single-Look Complex [version 1.1]
- Interferometric SAR [version 1.2]

The **CEOS-ARD Normalised Radar Backscatter [NRB]** specification describes products that have been subject to Radiometric Terrain Correction (RTC) and are provided in the Gamma-Nought (γ_T^0) backscatter convention (Small, 2011), which mitigates the variations from diverse observation geometries and is recommended for most land applications. An additional metadata layer can be optionally provided for conversion of γ_T^0 to Sigma-Nought (σ_T^0) backscatter layer for compatibility with legacy software or numerical models. As the **[NRB]** product contains backscatter values only, it cannot be directly used for SAR polarimetry or interferometric applications that require relative polarization phase or local phase estimates respectively. However, as an option, a “flattened” phase data layer can be provided with an **[NRB]** product for enabling InSAR analysis. The flattened phase is the interferometric phase, with respect to a reference orbit and to a digital elevation model (DEM), for which the topographic phase contribution is removed.

The **CEOS-ARD Polarimetric Radar [POL]** product format is an extension of the CEOS-ARD Normalised Radar Backscatter format **[NRB]**. This extension is required in order to better support Level-1 SLC polarimetric data, including full-polarimetric modes (e.g., RADARSAT-2, ALOS-2/4, SAOCOM-1 and future missions), and hybrid or linear dual-polarimetric modes (i.e., Compact Polarimetric mode available on RCM, SAOCOM and the upcoming NISAR mission). The **[POL]** product can be defined in two processing levels:

- The normalised covariance matrix **[CovMat]** representation (C2 or C3) which preserves the inter-channel polarimetric phase(s) and maximizes the available information for users. Interoperability within current CEOS-ARD SAR backscatter definition is preserved, since diagonal elements of the covariance matrix are backscatter intensities. Scattering information enhancement can be achieved by applying incoherent polarimetric decomposition techniques (e.g., Freeman-Durden, van Zyl, Cloude-Pottier, Yamaguchi-based) directly on the C2 or C3 matrix.
- Polarimetric Radar Decomposition **[PRD]** refers to ARD products where polarimetric information is broken down into simplified parameters to facilitate user interpretation of the data. They are derived from coherent or incoherent polarimetric decomposition techniques.

Notice and Limitations [POL]

For Polarimetric Radar **[POL]** products, optimal incoherent Polarimetric Radar Decomposition **[PRD]** should be performed under the slant range projection (Gens *et al.*, 2013, Toutin *et al.*, 2013). In order to minimise bias in the CEOS-ARD SAR Level-2a covariance matrix product, speckle filtering and averaging of the covariance matrix should be applied in the slant range projection, and nearest neighbour method is recommended for resampling the data to the geocoded format. Specifically, nearest-neighbour resampling ensures that the averaged covariance matrix elements in slant range and in geocoded ground projection are exactly the same. Consequently, the polarimetrically derived parameters are exactly equal in both approaches (assuming that no further averaging is performed on the ARD product for decomposing the polarimetric information). Bilinear and average resampling methods are also suitable for resampling the covariance matrix, but some differences with polarimetric parameters generated in slant range and then resampled (bilinear) might be observed on sloped terrains. Even if Sinc interpolation may be more robust for spatial resampling, it does not preserve covariance matrix integrity, and should consequently not be used for this ARD product.

It is recommended that ARD providers who desire to distribute **[PRD]** products decompose the polarimetric information starting from Level-1 SLC data and then geocode the derived parameters rather than use the **[CovMat]** ARD product. Resampling can be performed using any of the supported methods (nearest-neighbour, bilinear, average, bi-cubic spline or Lanczos are recommended), which need to be indicated in the product metadata. Note that coherent decomposition techniques cannot be performed on **[CovMat]** ARD products.

Covariance matrix products contain a variable number of layers (or bands) with different data types depending on the polarimetric mode (full or dual) and decomposition technique. The **[CovMat]** products for the C2 matrix have 3 layers (2 real-valued diagonal elements and 1 complex-valued off-diagonal element). **[CovMat]** products for the C3 matrix have 6 layers (3 real-valued diagonal elements and 3 complex-valued off-diagonal elements). Layers that can be obtained via a complex conjugation of other layers are not provided within the product. Polarimetric Decomposition products contain typically 2 to 4 (or more) real-valued layers depending on the particular decomposition algorithm. Within the **[CovMat]** product files, ARD layers are organized in order to reduce access delays and maximize efficiency in extracting the desired information. In **[CovMat]** products, geographically contiguous samples for each layer may be stored next to each other and organized “layer by layer”. Alternatively, samples belonging to the same covariance matrix might be stored next to each other and organized “matrix by matrix”. **[PRD]** products are organized “layer by layer”, i.e., with bands corresponding to the output of the polarimetric decomposition stored next to each other).

The **CEOS-ARD Ocean Radar Backscatter [ORB]** product specification describes products that have been projected on a geoid and are provided in the Sigma-Nought (σ^0) backscatter convention, which is recommended for most ocean applications. Backscatter may be calibrated to the ellipsoid (σ_E^0) or radiometrically terrain corrected (σ_T^0) prior to geometric terrain correction. As the basic **[ORB]** product contains backscatter values only, it *cannot* be directly used for SAR polarimetry or interferometric applications that require local phase estimates. Nonetheless, an advanced **[ORB]** product could include the upper diagonal of the polarimetric σ^0 covariance matrix for enabling advanced polarimetric analysis (similar to the **[POL]** product).

The **CEOS-ARD Geocoded Single-Look Complex (GSLC)** product is relevant to interferometric studies. The **[GSLC]** product is derived from the range-Doppler (i.e. slant range) Single-Look Complex (SLC) product using a DEM and the orbital state vectors and output in the map projected system. The phase of a geocoded SLC is “flattened” with respect to a reference orbit and to a DEM, to eliminate topographic phase contributions [Zebker *et al.*, 2017 and Zheng and Zebker, 2017]. The sample spacing of the **[GSLC]** product in the map coordinate directions is comparable to the full resolution original SLC product. The **[GSLC]** product can be directly overlaid on a map or combined with other similar **[GSLC]** products to derive interferograms and create change maps, for example. Since the **[GSLC]** phase is flattened, the phase difference between two **[GSLC]** products acquired on a same relative orbit produces an interferogram referring only to surface displacement and noise (i.e., no topographic fringes). The **[GSLC]** product may optionally be radiometrically terrain corrected such that the squared amplitude yields γ_T^0 .

The **CEOS-ARD Interferometric SAR [InSAR]** product format specification describes products resulting from InSAR processing steps. Two levels of product categories are supported: 1) The first level includes InSAR coherence and wrapped interferogram

images derived from a pair (or several pairs) of SLC or GSLC source data listed in the product metadata file. The product metadata file reports the processing information (parameters and methods) used to produce them. The PFS also supports unwrapped interferograms, but their inclusion is not a threshold requirement for this product level. An InSAR pair identification label allows support of InSAR time series products derived from several repeated pass SAR source combinations. A Boolean flag is used to indicate whether the interferometric phases due to Earth curvature and to the surface topography are removed from interferograms. This **[InSAR]** product level can then serve as input in temporal coherence analysis techniques or as input in production of time series displacement products by distributed target approaches like Small BAseline Subset (SBAS) technique [Lanari *et al.* 2004]. 2) InSAR displacement belongs to the second level of **[InSAR]** products. Displacement products can be expressed as InSAR displacement from a pair of SAR acquisitions and/or from a time series of SAR acquisitions, as a displacement and/or as displacement rate products over a time period. Since several different InSAR displacement approaches exist in the literature for which, each have their own criteria and parameters, it is not possible to prescribe specific metadata details. Nonetheless, it is required that main processing steps (with reference to methodologies), with their chosen parameters (criteria like statistical thresholds and estimation window sizes) are well defined in the displacement product metadata, in order to preserve traceability for the end users. For **[InSAR]** displacement products generated from first level CEOS-ARD **[InSAR]**, listed “source” products in the metadata can refer to those first level CEOS-ARD **[InSAR]** described above. In accordance with other CEOS-ARD products, per-pixel metadata and data are terrain geocoded products.

As can be seen from the above PFS descriptions, only a few minor details in terms of generated parameters and/or the addition of supplemental data distinguish these CEOS-ARD products. In part, they are to a large extent all backward-compatible. For example, **[POL]** products implicitly include **[NRB]** products, while a coastal **[NRB]** or **[POL]** product can simply be made compatible with other **[ORB]** products by applying gamma-to-sigma conversion. Just as **[GSLC]** can be converted to **[NRB]**, the inverse conversion can be made true by including the optional topographically flattened phase. In this way a **[NRB]** or **[POL]** product can be used like a **[GSLC]** for InSAR applications. Consequently, it becomes obvious that they all can follow a common approach, in terms of content and structure, in order to optimize their interoperability.

For this combined **CEOS-ARD for Synthetic Aperture Radar** PFS, as for the individual **[NRB]**, **[POL]**, **[ORB]**, **[GSLC]**, and **[InSAR]** PFSs, metadata requirements are defined under two categories: Threshold and Goal. **Threshold requirements** refer to metadata parameters or data files which are mandatorily required in a product in order to be CEOS-ARD compliant. **Goal requirements** (formerly called Target) are complementary metadata parameters or data files that are desirable or more accurate but more constraining/challenging to achieve depending on the SAR missions and the data provider constraints. Since this document integrates four CEOS-ARD PFSs, it is worth noting that some requirements have been “relaxed” for a few Threshold parameters,

depending on the applications/environment of the CEOS-ARD product. Exceptions are identified in the tables by specifying the usage.

Definitions and Abbreviations

Ancillary Data	Data other than instrument measurements, originating in the instrument itself or from the satellite, required to perform processing of the data. They include orbit data, attitude data, time information, spacecraft engineering data, calibration data, data quality information, and data from other instruments.
Auxiliary Data	The data required for instrument processing, which does not originate in the instrument itself or from the satellite. Some auxiliary data will be generated in the ground segment, whilst other data will be provided from external sources.
CEOS-ARD	Committee on Earth Observation Satellites - Analysis Ready Data
CovMat	Normalised Radar Covariance Matrix
DOI	Digital Object Identifier
GSLC	Geocoded Single-Look Complex
InSAR	Interferometric Synthetic Aperture Radar
Metadata	Structured information that describes other information or information services. With well-defined metadata, users should be able to get basic information about data without a need to have knowledge about its entire content.
NRB	Normalised Radar Backscatter
Pixel Spacing	Processed sample distance
POL	Polarimetric Radar
PRD	Polarimetric Radar Decomposition
RTC	Radiometrically Terrain Corrected
Spatial Resolution	The smallest size objects that can be distinguished by the sensor at the ground surface.
Spatial Sampling Distance	Spatial sampling distance is the great circle distance on the reference surface distance between adjacent spatial samples on the Earth's surface.

Requirements

General Metadata

These are metadata records describing a distributed collection of pixels. The collection of pixels referred to must be contiguous in space and time. General metadata should allow the user to assess the overall suitability of the dataset and must meet the requirements listed below. The column “CEOS-ARD product” indicates to which CEOS-ARD SAR product (NRB, POL, ORB, GSLC) the parameter refers.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.1	Traceability	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ...	Not required
			<u>Goal (Desired) Requirements</u> Data must be traceable to SI reference standard. <i>Note 1: Relationship to 3.5. Traceability requires an estimate of measurement uncertainty.</i> <i>Note 2: Information on traceability should be available in the metadata as a single DOI landing page.</i>	<u>Other feedback:</u> ...	
1.2	Metadata Machine Readability	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Metadata is provided in a structure that enables a computer algorithm to be used to consistently and automatically identify and extract each component/variable for further use.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u>	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> As threshold, but metadata is formatted in accordance with CEOS-ARD SAR Metadata Specifications, v.1.0, or in a community endorsed standard that facilitates machine-readability, such as ISO 19115-2, Climate and Forecast (CF) convention and the Attribute Convention for Data Discovery (ACDD), etc.	Confirmed. NetCDF format. <u>Other feedback:</u> ...	
1.3	Product Type	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> CEOS-ARD product type name – or names in case of compliance with more than one product type – and, if required by the data provider, copyright.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> Variable: identification/ceos_analysis_ready_data_product_type units: unitless description: CEOS Analysis Ready Data (CARD) product type name value: InSAR <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
1.4	Document Identifier	[NRB] [POL] [ORB]	<u>Threshold (Minimum) Requirements</u> Reference to CEOS-ARD for Synthetic Aperture Radar PFS document as URL.	<u>Achieved level:</u> Threshold / Goal	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> As threshold.	<u>Explanation / Justification:</u> Variable: identification/ceos_analysis_ready_data_document_identifier units: unitless description: CEOS Analysis Ready Data (CARD) document identifier value: https://ceos.org/ard/files/PFS/SAR/v1.2/CEOS-ARD_PFS_Synthetic_Aperture_Radar_v1.2.pdf <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
1.5	Data Collection Time	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Number of source data acquisitions of the data collection is identified. The start and stop UTC time of data collection is identified in the metadata, expressed in date/time. In case of composite products, the dates/times of the first and last data takes and the per-pixel metadata 2.8 (Acquisition ID Image) is provided with the product.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> Variable: identification/ceos_number_of_input_granules units: unitless description: Number of	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> As threshold.	input data granule used during processing. value: 405 Variable: identification/reference_datetime description: UTC datetime of the acquisition sensing start of the reference epoch to which the unwrapped phase is referenced. value: 2016-08-10 14:07:35.353226 Variable: identification/secondary_datetime description: UTC datetime of the acquisition sensing start of current acquisition used to create the unwrapped phase. value: 2016-09-03 14:07:36.466159 <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.6	Source Data Attributes		Subsection describing (detailing) <u>each SAR acquisition</u> used to generate the ARD product. <i>Note 1: Source data attribute information is described for each acquisition and sequentially identified, e.g. as acqID= 1, 2, 3, ...</i> <i>Note 2: Source data attribute information can refer to [NRB], [POL], [ORB], [InSAR] or [GSLC] products for higher level ARD derived from those, under the condition of their availability (item 1.6.1).</i>		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.6.1	Source Data Access	[NRB] [POL] [ORB] [GSLC]	<u>Threshold (Minimum) Requirements</u> The metadata identifies the location from where the source data can be retrieved, expressed as a URL or DOI.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u>	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
		[InSAR]	<u>Goal (Desired) Requirements</u> The metadata identifies an online location from where the data can be consistently and reliably retrieved by a computer algorithm without any manual intervention being required.	Variable: identification/source_data_access description: The metadata identifies the location from where the source data can be retrieved, expressed as a URL or DOI. value: https://search.asf.alaska.edu/#/?dataset=OPERA-S1&productTypes=CSLC <u>Other feedback:</u> ...	
1.6.2	Instrument	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> The instrument used to collect the data is identified in the metadata: - Satellite name - Instrument name	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> Variable:	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> As threshold, but including a reference to the relevant CEOS Missions, Instruments and Measurements Database record.	identification/source_data_satellite_names description: Names of satellites included in input granules value: S1B, S1A Variable: identification/instrument_name description: Instrument name value: C-SAR <u>Other feedback:</u> ...	
1.6.3	Source Data Acquisition Time	[NRB] [POL] [ORB] [GSLC]	<u>Threshold (Minimum) Requirements</u> The start date and time of source data is identified in the metadata, expressed in UTC in date and time, at least to the second.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u>	Verified at Threshold, Goal Level not assessed.

		[InSAR]	<u>Goal (Desired) Requirements</u> As threshold.	Variable: identification/reference_zero_doppler_start_time description: Zero doppler start time of the first burst contained in the frame for the reference acquisition. value: 2016-08-10 14:07:35.353226 Variable: identification/reference_zero_doppler_end_time description: Zero doppler start time of the last burst contained in the frame for the reference acquisition. value: 2016-08-10 14:08:02.435180 Variable: identification/secondary_zero_doppler_start_time description: Zero doppler start time of the first burst contained in the frame for the secondary acquisition. value: 2016-09-03 14:07:36.466159 Variable: identification/secondary_zero_doppler_end_time description: Zero doppler start time of the last burst contained in the frame for the secondary acquisition.	
--	--	---------	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
				value: 2016-09-03 14:08:03.546057 <u>Other feedback:</u> ...	
1.6.4	Source Data Acquisition Parameters	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Acquisition parameters related to the SAR antenna: - Radar band - Centre frequency - Observation mode (i.e., Beam mode name) - Polarization(s) (listed as in original product) - Antenna pointing [Right/Left] - Beam ID (i.e., Beam mode Mnemonic)	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> Variable: identification/radar_band description: Acquired radar frequency band value: C Variable: identification/radar_center	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> As threshold.	_frequency units: Hertz description: Radar center frequency of input products value: 5405000454.33435 Variable: identification/acquisition_mode description: Radar acquisition mode for input products value: IW Variable: identification/source_data_acquisition_polarization description: Polarization type of source radar acquisition value: VV/VH Variable: identification/look_direction description: Look direction can be left or right value: Right BeamID: same as acquisition mode <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
1.6.5	Source Data Orbit Information	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Information related to the platform orbit used for data processing: - Pass direction [asc/desc] * - Orbit data source [e.g., predicted/ definite/ precise/ downlinked, etc.] - Relative orbit number (for [GSLC] and [InSAR] only) <i>* For source data crossing the North or South Pole, it is recommended to produce two distinct CEOS-ARD products and to use the appropriate "Pass direction" in each.</i> <u>Goal (Desired) Requirements</u> As threshold, including also: - Platform heading angle expressed in degrees [0 360] from North - Orbit data file containing state vectors (minimum of 5 state vectors, from 10% of scene length <i>before</i> start time to 10% of scene length <i>after</i> stop time) - Platform (mean) altitude. - Absolute orbit number - For [GSLC], perpendicular baseline to virtual orbit or reference orbit used for phase correction	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Global: ORBIT_DIRECTION: Descending ORBIT_DIRECTION_DESCRIPTION : Orbit direction of the processed frame (ascending or descending) identification/source_data_reference_orbit_type description: Type of orbit (precise, restituted) used during input data processing for the reference acquisition value: precise orbit file TRACK_NUMBER: 42 TRACK_NUMBER_DESCRIPTION: Track Number/Relative orbit number of source data of the processed frame <u>Other feedback:</u> ...	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
1.6.6	Source Data Processing Parameters	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Processing parameters details of the source data: - Processing facility - Processing date - Software version - Product level - Product ID (file name) - Azimuth number of looks - Range number of looks (separate values for each beam, as necessary) Note: Azimuth and Range number of looks are not required when sources are CEOS-ARD or any other geocoded products	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Variable: identification/source_data_processing_facility description: Product processing facility value: NASA Jet Propulsion Laboratory on AWS identification/source_data_	Verified at Threshold

			<u>Goal (Desired) Requirements</u> As threshold, plus additional relevant processing parameters, e.g., range- and azimuth look bandwidth and LUT applied.	<pre> earliest_processing_datetime units: unitless description: Earliest processing datetime of input granules value: 2024-04- 26T00:00:00 identification/source_data_ latest_processing_datetime units: unitless description: Latest processing datetime of input granules value: 2024-06- 24T00:00:00 metadata/source_data_softwa re_COMPASS_version description: COMPASS (CSLC-S1 processor) version used for processing value: 0.5.5 metadata/source_data_softwa re_ISCE3_version description: ISCE3 version used for processing value: 0.15.1 metadata/source_data_softwa re_s1_reader_version description: S1 reader version used for processing value: 0.2.4 identification/source_data_ file_list description: List of input coregistered SLC </pre>	
--	--	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
				granules used to create displacement frame value: OPERA_L2_CSLC-S1_T042-088914-IW2_20161208T140740Z_20240427T092024Z_S1A_VV_v1.1, OPERA_L2_CSLC-S1_T042-088917-IW2_20170218T140745Z_20240427T125154Z_S1A_VV_v1.1, OPERA_L2_CSLC-S1_T042-088914-ETC... file name contains product level, L2 Azimuth and range looks not required as source is geocoded. <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.6.7	Source Data Image Attributes	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Image attributes related to the source data: - Source Data geometry (slant range/ground range/geocoded) - Azimuth pixel spacing [m] (alternatively, Azimuth pixel spacing can be provided in second [s], equivalent to the azimuth time sample interval) - Range pixel spacing - Azimuth resolution - Range resolution - Near range incident angle - Far range incident angle Note: For geocoded sources ([GSLC] and [InSAR]), Azimuth and Range pixel spacing are replaced by line (row) and pixel (column) spacing information. Spatial resolution information is not required for geocoded sources.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> identification/source_data_imaging_geometry description: Imaging geometry of input coregistered SLCs value: Geocoded Global: PRODUCT_SAMPLE_SPACING: 30 PRODUCT_SAMPLE_SPACING_DESCRIPTION: Spacing between adjacent X/Y samples of product in UTM coordinates identification/source_data_range_resolutions units: meters description: List of	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> Geometry of the image footprint expressed in WGS84 in a standardised format (e.g., WKT).	[IW1, IW2, IW3] range resolutions from source L1 Sentinel-1 SLCs value: [2.7, 3.1, 3.5] identification/source_data_azimuth_resolutions units: meters description: List of [IW1, IW2, IW3] azimuth resolutions from L1 Sentinel-1 SLCs value: [22.5, 22.7, 22.6] identification/near_range_incidence_angle units: degrees description: Incidence angle at the near range of the displacement frame value: 30.899999618530273 identification/far_range_incidence_angle units: degrees description: Incidence angle at the far range of the displacement frame value: 46.0 <u>Other feedback:</u> ...	
1.6.8	Sensor Calibration	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
		[ORB] [GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> Sensor calibration parameters are identified in the metadata or can be accessed using details included in the metadata. Ideally this would support machine to machine access.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
1.6.9	Performance Indicators	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Provide performance indicators on data intensity noise level ($NE\sigma^0$ and/or $NE\beta^0$ and/or $NE\gamma^0$ (noise equivalent Sigma- and/or Beta- and/or Gamma-Nought)). Provided for each polarization channel when available. Parameter may be expressed as the mean and/or minimum and maximum noise equivalent values of the source data. Values do not need to be estimated individually for each product, but may be estimated once for each acquisition mode, and annotated on all products.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> identification/source_data_max_noise_equivalent_sigma_zero units: dB description: Maximum Noise equivalent sigma0 in dB value: -22.0	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> Provide additional relevant performance indicators (e.g., ENL, PSLR, ISLR, and performance reference DOI or URL).	<pre>estimated_phase_quality _FillValue: nan units: unitless description: Sliding window estimate of multi- looked phase noise long_name: Estimated phase quality grid_mapping: spatial_ref</pre> <u>Other feedback:</u> ...	
1.6.10	Source Data Polarimetric Calibration Matrices	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> The complex-valued polarimetric distortion matrices with the channel imbalance and the cross-talk applied for the polarimetric calibration.	<u>Other feedback:</u> ...	
1.6.11	Mean Faraday	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
	Rotation Angle	[ORB] [GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> The mean Faraday rotation angle estimated from the polarimetric data and/or from models with reference to the method or paper used to derive the estimate.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
1.6.12	Ionosphere Indicator	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> Flag indicating whether the backscatter imagery is “significantly impacted” by the ionosphere (0 – false, 1 – true). Significant impact would imply that the ionospheric impact on the backscatter exceeds the radiometric calibration requirement or goal for the imagery.	<u>Other feedback:</u> ...	
1.7	CEOS-ARD Product Attributes		Subsection containing information related to the CEOS-ARD product generation procedure and geographic parameters.		
1.7.1	Product Data Access	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Processing parameters details of the CEOS-ARD product: - Processing facility - Processing date - Software version - Location from where CEOS-ARD product can be retrieved, expressed as a URL or DOI.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Global: PROCESSING_FACILITY: NASA Jet Propulsion Laboratory on AWS	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> The metadata identifies an online location from where the data can be consistently and reliably retrieved by a computer algorithm without any manual intervention being required.	Global: PROCESSING_DATETIME: 2025-07-02T16:08:58.075905Z Global: DISP_S1_SOFTWARE_VERSION: 0.5.9 DISP_S1_SOFTWARE_VERSION_DESCRIPTION: Version of the disp-s1 software used to generate the product. PRODUCT_DATA_ACCESS: https://search.asf.alaska.edu/#/?dataset=OPERA-S1&productTypes=DISP-S1-STATIC PRODUCT_DATA_ACCESS_DESCRIPTION: Location from where this product can be retrieved, expressed as a URL or DOI. PRODUCT_LANDING_PAGE_DOI: https://doi.org/10.5067/SNWG/OPL3DISPS1-V1 <u>Other feedback:</u> ...	
1.7.2	Auxiliary Data	[NRB] [POL] [ORB]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> The metadata identifies the sources of auxiliary data used in the generation process, ideally expressed as DOIs. <i>Note: Auxiliary data includes DEMs, etc., and any additional data sources used in the generation of the product.</i>	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
1.7.3	Product Sample Spacing	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> CEOS-ARD product processing parameters details: - Pixel (column) spacing - Line (row) spacing	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> PRODUCT_SAMPLE_SPACING: 30 PRODUCT_SAMPLE_SPACING_DESCRIPTION: Spacing between adjacent X/Y samples of product in UTM coordinates <u>Other feedback:</u> ...	Verified at Threshold
1.7.4	Product Equivalent Number of Looks	[NRB] [POL] [ORB] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Equivalent Number of Looks (ENL)	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
1.7.5	Product Resolution	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[ORB] [GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> Average spatial resolution of the CEOS-ARD product along: - Columns - Rows	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
1.7.6	Product Filtering	[NRB] [POL] [ORB]	<u>Threshold (Minimum) Requirements</u> Flag if speckle filter has been applied [True/False]. Metadata should include: - Reference to algorithm as DOI or URL - Input filtering parameters o Type o Window size in pixel units o Any other parameters defining the speckle filter used Mandatory for [POL]: Advanced polarimetric filter preserving covariance matrix properties should be applied.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
			<u>Goal (Desired) Requirements</u> As threshold.		
1.7.7	Product Bounding Box	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Two opposite corners of the product file (bounding box, including any zero-fill values) are identified, expressed in the coordinate reference system defined in 1.7.11. Four corners of the product file are recommended for scenes crossing the Antemeridian, or the North or the South Pole.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> === Coordinate Reference System (CRS) === EPSG:32610	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> As threshold.	=== Image Bounds === Left: 523440.0 Bottom: 4055790.0 Right: 811380.0 Top: 4261770.0 <u>Other feedback:</u> ...	
1.7.8	Product Geographical Extent	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> The geometry of the SAR image footprint expressed in longitude/latitude based on WGS84 (EPSG 4326), in a standardised format (e.g., WKT Polygon).	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Attributes: (12/19)	Verified at Threshold, Goal Level not assessed.

			<u>Goal (Desired) Requirements</u> As threshold.	<pre> crs_wkt: PROJCRS["WGS 84 / UTM zone 10N",BASEGE... semi_major_axis: 6378137.0 semi_minor_axis: 6356752.314245179 inverse_flattening: 298.257223563 reference_ellipsoid_name: WGS 84 longitude_of_prime_meridian : 0.0 false_easting: 500000.0 false_northing: 0.0 scale_factor_at_central_mer idian: 0.9996 GeoTransform: 523440.0 30.0 0.0 4261770.0 0.0 -30.0 units: unitless long_name: Dummy variable with geo- referencing me..., 'y': <xarray.IndexVariable 'y' (y: 6866)> Size: 55kB array([4261755., 4261725., 4261695., ..., 4055865., 4055835., 4055805.]) </pre> <u>Other feedback:</u> ...	
--	--	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.7.9	Product Image Size	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Image attributes of the CEOS-ARD product*: - Number of lines - Number of pixels per line - File header size (if applicable) - Number of no-data border pixels (if appl.)	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> image size” is part of the native	Verified at Threshold, Goal Level not assessed.

			<u>Goal (Desired) Requirements</u> As threshold.	<pre> netcdf metadata. using xarray: # Open the NetCDF file ds = xr.open_dataset("/scratch/chapman/OPERA_DISP/OPERA_L3_DISP- S1_IW_F11115_VV_20160810T140 735Z_20160903T140736Z_v1.0_20 250408T164117Z.nc") # Display dataset metadata print(ds) Result: <xarray.Dataset> Size: 3GB Dimensions: (y: 6866, x: 9598, time: 1) Coordinates: * y (y) float64 55kB 4.262e+06 ... 4.056e+06 * x (x) float64 77kB 5.235e+05 ... 8.114e+05 * time (time) datetime64[ns] 8B 2016-09-03T14:07... Using Netcdf: # List variables print(nc.variables.keys()) </pre>	
--	--	--	--	--	--

				<pre> # Access a variable print("size of displacement layer") var = nc.variables["displacement"] # Get shape print(f"Shape of variable: {var.shape}") # Number of lines and samples lines, samples = var.shape print(f"Lines: {lines}, Samples: {samples}") result: dict_keys(['spatial_ref', 'y', 'x', 'time', 'reference_time', 'displacement', 'short_wavelength_displacem ent', 'recommended_mask', 'connected_component_labels ', 'temporal_coherence', 'estimated_phase_quality', 'persistent_scatterer_mask' , 'shp_counts', 'water_mask', 'phase_similarity', 'timeseries_inversion_resid uals']) size of displacement layer Shape of variable: (6866, 9598) Lines: 6866, Samples: 9598 identification/nodata_pixel </pre>	
--	--	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
				_count _units: unitless description: Number of nodata pixels value: 18985501 <u>Other feedback:</u> ...	
1.7.10	Product Pixel Coordinate Convention	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Coordinate referring to the Centre, or the Upper Left Corner or the Lower Left Corner of a pixel. Values are [pixel centre, pixel ULC or pixel LLC].	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> metadata/product_pixel_coordinate_convention description: x/y coordinate convention referring to pixel center or corner value: pixel center <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
			<u>Goal (Desired) Requirements</u> As threshold.		
1.7.11	Product Coordinate Reference System	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> The metadata lists the map projection (or geographical coordinates, if applicable) that was used and any relevant parameters required to geolocate data in that map projection, expressed in a standardised format (e.g., WKT). Indicate EPSG code, if defined for the CRS.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> === Coordinate Reference System (CRS) === EPSG:32610	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> As threshold.	Other feedback: ...	
1.7.12	Look Direction Polynomials	[ORB]	<u>Threshold (Minimum) Requirements</u> In case the per-pixel item 2.11 (Look Direction Image) is not provided, then a list of the polynomial coefficients a_i necessary to reconstruct the look direction angle*, together with an estimate of the added error from use of polynomial vs. per-pixel more accurate values, shall be provided. Example polynomial: $\text{LookDir} = a_1\text{Lat}^2 + a_2\text{Lon}^2 + a_3\text{LatLon} + a_4\text{Lat} + a_5\text{Lon} + a_6$ where: a_i = polynomial coefficients Lat = latitude Lon = longitude Lat and Lon are the related coordinates in the product map units ['m', 'deg', 'arcsec'] <i>* The look direction angle represents the planar angle between north and each range direction. It is not constant in range, especially close to the poles.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
			<u>Goal (Desired) Requirements</u> As threshold.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.7.13	Radar Unit Look Vector	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> 3-D components radar unit look vector, specified at centre of scene, in an Earth-Centred Earth-Fixed (ECEF) coordinate system (also called Earth Centred Rotating - ECR) is provided. It consists of unit vectors from antenna to surface pixel (i.e., positive Z component). Only required if per-pixel metadata 2.12 (Radar Unit Look Vector Grid Image) is not provided. <u>Goal (Desired) Requirements</u> As threshold.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> LOS in ENU per pixel image is provided <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
1.7.14	Slant Range Sensor to Surface	[GSLC]	<u>Threshold (Minimum) Requirements</u> Slant range distance from the sensor to the surface, specified at centre of scene. Only required if per-pixel metadata 2.13 (Slant Range Sensor to Surface Image) is not provided. <u>Goal (Desired) Requirements</u> As threshold.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
1.7.15	Reference Orbit	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	N/A

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
		[GSLC]	<u>Goal (Desired) Requirements</u> Usage: For [NRB] & [POL] only when per-pixel metadata 3.7 (Flattened phase) is provided. For [GSLC] when a reference orbit is used instead of a virtual orbit (see Annex A 1.2). Provide the absolute orbit number used as reference for topographic phase flattening. In case a virtual orbit has been used, provide orbit parameters or orbit state vectors as DOI or URL. Provide scene-centred perpendicular baseline for the for the source data relative to the reference orbit used (for approximate use only).	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.7.16	InSAR Pair	[InSAR]	<u>Threshold (Minimum) Requirements</u> InSAR baseline criteria information - Baseline type: Single Reference, Multi-baseline or All - Minimal and maximal perpendicular baselines (not required when type = "All") - Minimal and maximal temporal baselines (not required when type = "All") When [InSAR] product contains data derived from InSAR pairs, as defined under items 3.8, 3.9, and 3.10, provide list of source acquisition ID (e.g. as per item 1.6 acqID) for the InSAR pair (primary and secondary acquisitions). Repeat for multiple InSAR pair products and assign/specify InSAR pair ID number (e.g. insarID = 1,2,3 ...) For multi-polarisation source acquisition, specify the polarisation used for the InSAR pair. Provide Perpendicular and Parallel orbit baseline information estimated at scene centre. In addition, orbital baseline information can be provided as per pixel metadata 2.18 and 2.19. Flag if orbital baseline refinement has been applied [true/false]. If true, specify refinement method (ex.: GCPs, FFT, ...). Azimuth common band filtering and range spectral shift filtering flags	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> metadata/ceos_insar_pair_baseline_criteria_information description: InSAR pair baseline selection criteria value: All identification/source_data_polarization units: unitless description: Radar polarization of input products used value: VV metadata/ceos_insar_azimuth_common_band_filtering description: Flag to indicate if azimuth filtering applied during interferogram formation value: False Variable: metadata/ceos_insar_range_spectral_shift_filtering description: Flag to indicate if range spectral shift filtering applied	Verified at Threshold.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> Source type format with value "GSLC" should be provided when InSAR analysis is performed from [GSLC] products generated from SLC source acquisitions listed under item 1.6. If GSLC data aren't provided with the InSAR product, provide the [GSLC] URL link(s) if it is available. If source acquisitions listed under 1.6 are [GSLC], discard this note.	during interferogram formation value: False <u>Other feedback:</u> ...	
1.7.17	InSAR Pair Co registration	[InSAR]	<u>Threshold (Minimum) Requirements</u> Co-registration information of source acquisitions with a reference source. Provide reference source ID (or filename if different from source list) and for each co-registered source, report the azimuth and range standard deviation error in metre or sample fraction. <u>Not required when the InSAR product is generated from [GSLC] products</u>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> INSAR product is generated from GSLC products <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
			<u>Goal (Desired) Requirements</u> As threshold.		

1.7.18	Local InSAR Phase Quality	[InSAR]	<u>Threshold (Minimum) Requirements</u> Local InSAR phase quality estimation information • Methodology name [ex.: Coherence, DespeckKS, Persistent Scatterers [Temporal variability of intensity and/or Spectral diversity correlation], ...] • Reference to methodology [text or DOI] • Estimation parameters and selection criteria used, as for examples: 1. For coherence ▪ Window size ▪ Weighting shape ▪ Coherence threshold for selection 2. For DespeckKS [Ferretti <i>et al.</i> 2011] or similar statistical approach ▪ Window size ▪ Statistical test function (Kolmogorov-Smirnov, Anderson-Darling, ...) ▪ Number of statistically homogeneous pixels (SHP) threshold for selection ▪ Phase triangulation coherence (γ_{PTA}) threshold 3. For Persistent Scatterers ▪ Temporal variability of intensity - Intensity mean/std ratio threshold	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> Variable: metadata/ceos_shp_selection_selection_criteria _description: Name of statistically homogeneous pixel selection criteria value: glrt Variable: metadata/ceos_shp_selection_window_size _units: pixels _description: Size of window as (rows x columns) in pixels to search for SHPs value: 11x23 Variable: metadata/ceos_shp_selection_selection_threshold _units: unitless _description: Threshold for selecting statistically homogeneous pixels value: 0.001 Variable: metadata/ceos_persistent_scatterer_selection_criteria _description: Name of persistent scatterer selection criteria value: Amplitude Dispersion	Verified at Threshold, Goal Level not assessed.
--------	---------------------------	---------	--	--	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			- Relative intensity threshold - Spectral diversity correlation - Line and column spectral looks - Intensity minimal threshold - Spectral correlation threshold - Intensity mean/std ratio threshold All phase quality estimation techniques used should be listed.	Variable: metadata/ceos_persistent_scatterer_amplitude_dispersion_threshold units: unitless description: Threshold for persistent scatterer selection value: 0.15 Variable: metadata/ceos_persistent_scatterer_selection_criteria_doi description: DOI of reference describing persistent scatterer selection criteria value: https://doi.org/10.1109/36.898661	

			<u>Goal (Desired) Requirements</u> As threshold.	Variable: metadata/ceos_phase_similarity_metric_doi description: DOI of reference describing phase cosine similarity metric value: https://doi.org/10.1109/TGRS.2022.3210868 Variable: metadata/ceos_estimated_phase_quality_metric_algorithm description: Algorithm used on wrapped phase to create estimated phase quality metric value: Gaussian filtering Variable: metadata/ceos_phase_unwrapping_method description: Name of phase unwrapping method value: snaphu Variable: metadata/ceos_phase_unwrapping_snaphu_doi description: DOI to reference describing SNAPHU phase unwrapping algorithm value: https://doi.org/10.1364/JOSA.18.000338 Variable: metadata/ceos_phase_unwrapping_spurt_doi description: DOI to reference describing spurt	
--	--	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
				phase unwrapping algorithm value: https://doi.org/10.1016/j.rse.2023.113456 Variable: metadata/ceos_phase_unwrapping_similarity_threshold description: Threshold on phase similarity used to mask and interpolate interferogram before unwrapping value: 0.4 Variable: metadata/ceos_atmospheric_phase_correction description: Method used to correct for atmosphere phase noise value: None Variable: metadata/ceos_ionospheric_phase_correction description: Method used to correct for ionospheric phase noise value: None <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
1.7.19	Interferogram Filtering	[InSAR]	<u>Threshold (Minimum) Requirements</u> If applied, interferogram filtering information - Methodology name - Reference to methodology [text or DOI] - Filtering parameters used.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Not applied	Verified at Threshold, Goal Level not assessed.
			<u>Goal (Desired) Requirements</u> As threshold.	<u>Other feedback:</u> ...	
1.7.20	Phase Unwrapping	[InSAR]	<u>Threshold (Minimum) Requirements</u> If 3.10-Unwrapped Interferogram Image is provided, technique used for InSAR phase unwrapping - Methodology name - Reference to methodology [text or DOI] - Unwrapping parameters - Coherence threshold - Number of iterations - Stable reference point coordinates or multi-point approach information	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Variable: metadata/ceos_phase_unwrapping_method description: Name of phase unwrapping method value: snaphu Variable: metadata/ceos_phase_unwrapping_snaphu_doi	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> As threshold.	description: DOI to reference describing SNAPHU phase unwrapping algorithm value: https://doi.org/10.1364/JOSA.18.000338 Variable: metadata/ceos_phase_unwrapping_spurt_doi description: DOI to reference describing spurt phase unwrapping algorithm value: https://doi.org/10.1016/j.rse.2023.113456 Variable: metadata/ceos_phase_unwrapping_similarity_threshold description: Threshold on phase similarity used to mask and interpolate interferogram before unwrapping value: 0.4 <u>Other feedback:</u> ...	
1.7.21	Atmospheric Phase Correction	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/Requirements/Modifications
			<u>Goal (Desired) Requirements</u> If applied, reference to atmospheric phase correction technique and parameters used. • Methodology name • Reference to methodology [text or DOI]	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
1.7.22	Ionospheric Phase Correction	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> If applied, reference to ionospheric phase correction technique and parameters used. • Methodology name • Reference to methodology [text or DOI]		
1.7.23	Displacement Modelling	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> Reference to displacement modelling technique used • Methodology name • Reference to methodology [text or DOI] • Specific input parameters used If a temperature refinement model is used, indicate model and temperature data source.		

Per-Pixel Metadata

The following minimum metadata specifications apply to each pixel. Whether the metadata are provided in a single record relevant to all pixels or separately for each pixel is at the discretion of the data provider. Per-pixel metadata should allow users to discriminate between (choose) observations on the basis of their individual suitability for applications.

Cloud optimized file formats are recommended.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.1	Metadata Machine Readability	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Metadata is provided in a structure that enables a computer algorithm to be used to consistently and automatically identify and extract each component/variable for further use. <u>Goal (Desired) Requirements</u> As threshold, but metadata is formatted in accordance with CEOS-ARD SAR Metadata Specifications, v.1.0, or in a community endorsed standard that facilitates machine-readability, such as ISO 19115-2, Climate and Forecast (CF) convention and the Attribute Convention for Data Discovery (ACDD), etc.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... netcdf <u>Other feedback:</u> ...	Verified at Threshold. Data is provided as part of NetCDF.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.2	Data Mask Image	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Mask image indicating: - Valid data - Invalid data - No data File format specifications/ contents provided in metadata: - Sample Type [Mask] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int, ...] - Bits per Sample - Byte Order - Bit Value Representation Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> The masks are included as datasets within the netcdf file, and each is described by the netcdf metadata as described in 1.7.9 <pre>recommended_mask _FillValue: 255 units: unitless similarity_threshold: 0.3 temporal_coherence_threshold: 0.6 uses_connected_component_labels: False description: Suggested mask to remove low quality pixels, where 0 indicates a</pre>	Verified at Threshold.

			<u>Goal (Desired) Requirements</u> As threshold, including additional bit value representations, e.g.: - Layover (masked as invalid data in threshold) - Radar shadow (masked as invalid data in threshold) - Ocean water - Land (recommended for [ORB]) - RTC applied (e.g., for maritime scenes with land samples for which RTC has been applied) - DEM gap filling (i.e., interpolated DEM over gaps) - [InSAR] Unwrapped interferogram phase quality flag/score	bad pixel, 1 is a good pixel. Pixels are set to 0 for three reasons: 1) the pixel is marked as water in /water_mask, 2) the pixel is 0 in /connected_component_labels, or 3) the pixel has low /temporal_coherence and low /phase_similarity, where 'low' is below the threshold listed in this dataset's attributes. long_name: Recommended Mask grid_mapping: spatial_ref persistent_scatterer_mask _FillValue: 255 units: unitless description: Mask of persistent scatterers downsampled to the multilooked output grid long_name: Persistent Scatterer Mask grid_mapping: spatial_ref water_mask _FillValue: 255 units: unitless description: Binary mask created to ignore water during processing. long_name: Water Mask grid_mapping: spatial_ref	
--	--	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
				Other feedback: ...	
2.3	Scattering Area Image	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[ORB] [GSLC] [InSAR]	Goal (Desired) Requirements Usage: Recommended for scenes that include land areas. DEM-based scattering area image used for Gamma-Nought terrain normalisation is provided. This quantifies the local scattering area used to normalise for radiometric distortions induced by terrain to the measured β^0 backscatter. The terrain-flattened γ_T^0 is best understood as β^0 divided by the local scattering area. File format specifications/ contents provided in metadata: - Sample Type [Scattering Area] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.4	Local Incident Angle Image	[NRB] [POL] [ORB] [GSLC]	<u>Threshold (Minimum) Requirements</u> DEM-based Local Incident angle image is provided. File format specifications/ contents provided in metadata: - Sample Type [Angle] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file. <i>Note: For maritime [ORB] scenes when no land areas are covered, a geoid model could be used for the calculation of the local incident angle</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
		[GSLC]	<u>Goal (Desired) Requirements</u> As threshold.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.5	Ellipsoidal Incident Angle Image	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Ellipsoidal incident angle is provided. File format specifications/ contents provided in metadata: - Sample Type [Angle] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order - Reference Ellipsoid Name Required when 2.12 Radar Unit Look Vector Grid Image is not provided Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> 2.12 is provided. <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[NRB] [POL] [ORB] [GSLC]	<u>Goal (Desired) Requirements</u> As threshold. Note: For maritime [ORB] scenes when no land areas are covered, the ellipsoidal incident angle is nearly identical to the geoid based local incident angle.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.6	Noise Power Image	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Estimated Noise Equivalent σ^0 (or β^0 or γ^0, as applicable) used for noise removal, if applied, for each channel. $NE\sigma^0$ and $NE\gamma^0$ are both based on either an ellipsoid Earth model or the local topography. File format specifications/ contents provided in metadata: - Sample Type [Gamma-Nought, Sigma-Nought, Beta-Nought] - Correction model type [Ellipsoid, Topography] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
2.7	Gamma-to-Sigma Ratio	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
	Image	[GSLC] [InSAR]	Goal (Desired) Requirements Ratio of the integrated area in the Gamma projection over the integrated area in the Sigma projection (ground). Multiplying γ_T^0 by this ratio results in an estimate of RTC σ_T^0. File format specifications/ contents provided in metadata: - Sample Type [Ratio] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.8	Acquisition ID Image	[NRB] [POL] [ORB] [GSLC]	<u>Threshold (Minimum) Requirements</u> Note: Required for multi-source product only. Acquisition ID, or acquisition date, for each pixel is identified. In case of multi-temporal image stacks, use source acquisition IDs (e.g., 1.6 acqID values) to list contributing images. In case of Date, data represent (integer or fractional) day offset to reference observation date [UTC]. Date used as reference ("Day 0") is provided in the metadata. Pixels not representing a unique date (e.g., pixels averaged in image overlap zones) are flagged with a pre-set pixel value that is provided in the metadata. File format specifications/ contents provided in metadata: - Sample Type [Day, Time, ID] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per sample - Byte Order	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> In case of image composites, the sources for each pixel are uniquely identified.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.9	Per-pixel DEM	[NRB] [POL] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required
			<u>Goal (Desired) Requirements</u> Provide DEM or DSM as used during the geometric and radiometric processing of the SAR data, resampled to an exact geometric match in extent and resolution with the CEOS-ARD SAR image product. Can also be provided with [ORB] products containing land areas. File format specifications/ contents provided in metadata: - Sample Type [Height] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

2.10	Per-pixel Geoid	[ORB]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
			<u>Goal (Desired) Requirements</u> Provide Geoid as used during the geometric and radiometric processing of the SAR data, resampled to an exact geometric match in extent and resolution with the CEOS-ARD ORB image product. File format specifications/ contents provided in metadata: - Sample Type [Height] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order - Ground Sampling Distance		
#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications

2.11	Look Direction Image	[ORB]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Look Direction Image is provided. It represents the planar angle between north and each range direction. File format specifications/ contents provided in metadata: - Sample Type [Angle] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
2.12	Radar Unit Look Vector	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Verified at Threshold

	Grid Image		<u>Goal (Desired) Requirements</u> 3-D components radar unit look vector, specified at each pixel in an Earth-Centred Earth-Fixed (ECEF) coordinate system (also called Earth Centred Rotating – ECR) is provided. It consists of unit vectors from the antenna to the surface pixel (i.e., positive Z component). In the case of [InSAR] product, 3-D components radar unit look vector of the reference acquisition. File format specifications/ contents provided in metadata: - Sample Type [3D unit vector] - Source acquisition ID (e.g. acqID) (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Double Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	<u>Explanation / Justification:</u> Separate static layer file in geotiff format with name: “los_enu.tif” This is the direction of the Line of Sight in East. North, and Up. <pre> === Band Count === 3 === Band Descriptions === Band 1: East component of line of sight unit vector (ground to satellite) Band 2: North component of line of sight unit vector (ground to satellite) Band 3: Vertical component of line of sight unit vector (ground to satellite) </pre> <u>Other feedback:</u> ...	
--	------------	--	--	---	--

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.13	Slant Range Sensor to Surface Image	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Slant range distance from the sensor to the surface, specified at each pixel in an Earth-Centred Earth-Fixed (ECEF) coordinate system (also called Earth Centred Rotating – ECR) is provided. In the case of [InSAR] product, the slant range distance of the reference acquisition File format specifications/ contents provided in metadata: - Sample Type [Length] - Source acquisition ID (e.g. acqID) (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order Note: For CEOS-ARD products created from repeat-pass acquisitions, with narrow orbital tube radius, a single static per pixel metadata file can be provided as a URL address of that unique metadata file.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required

2.14	InSAR Phase Uncertainty Image	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> Estimates of uncertainty in InSAR phase is provided, such as finite signal to noise ratio, quantization noise, platform state vector accuracy, or DEM error. Identification of which error sources are included will be provided as DOI/URL reference or brief description. It represents statistical variation from known noise sources only. In case both the wrapped and unwrapped interferograms are supplied, specify which interferogram the uncertainty image corresponds to. File format specifications/ contents provided in metadata: - Sample Type [Angle] - insarID number (for [InSAR] product only) - Corresponding interferogram (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
2.15	Atmospheric Phase Correction Image	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required
			<u>Goal (Desired) Requirements</u> Phase correction value at each pixel, if applied. File format specifications/ contents provided in metadata: - Sample Type [Angle] - insarID number (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
2.16	Ionospheric Phase	[GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

	Correction Image		<u>Goal (Desired) Requirements</u> Phase correction value at each pixel, if applied. DOI/URL reference to algorithm or brief description is provided. File format specifications/ contents provided in metadata: - Sample Type [Angle] - insarID number (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
2.17	Simulated Topographic Phase	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Simulated topographic phase image(s) used to remove topographic contribution to interferogram(s). File format specifications/ contents provided in metadata: - Sample Type [Angle] - insarID number (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required

2.18	InSAR Perpendicular Baseline	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> Perpendicular orbital baseline between primary and secondary source acquisitions. File format specifications/ contents provided in metadata: - Sample Type [Length] - insarID number (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order		
2.19	InSAR Parallel Baseline	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

			<u>Goal (Desired) Requirements</u> Parallel orbital baseline between primary and secondary source acquisitions. File format specifications/ contents provided in metadata: - Sample Type [Length] - insarID number (for [InSAR] product only) - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Float, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
2.20	InSAR Displacemen	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

	t Model Points		<u>Goal (Desired) Requirements</u> Data file(s) identifying pixels used for InSAR displacement modelling (items 3.11 to 3.14). As a suggestion, this information can be provided as a single multi-layer file, where each 1-bit layer, containing 0 (not used) and 1 (used) flags, refers to an insarID pair (for SBAS type InSAR) or Source ID (when insarIDs are not listed). Instead, a list of Dates identifying layers can be provided under this item. File format specifications/ contents provided in metadata: - Sample Type [Model Points] - Source ID or insarID number or Dates - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [1bit, 8bit, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
--	-----------------------	--	--	--	--

Radiometrically Corrected Measurements

The requirements indicate the necessary outcomes and, to some degree, the minimum steps necessary to be deemed to have achieved those outcomes. Radiometric corrections must lead to normalised measurement(s) of backscatter intensity and/or decomposed polarimetric parameters. As for the per-pixel metadata, information regarding data format specification needs to be provided for each record. The requirements below must be met for all pixels/samples/observations in a collection. Cloud optimized file formats are recommended.

The column "CEOS-ARD product" indicates which CEOS-ARD SAR product (NRB, POL, ORB, GSLC) the parameter refers to.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
3.1	Backscatter Measurements	[NRB]	<u>Threshold (Minimum) Requirements [NRB]</u> <u>"Terrain-flattened" Radiometrically Terrain Corrected (RTC) Gamma-Nought backscatter coefficient (γ_T^0)</u> is provided for each polarization. File format specifications/contents provided in metadata: - Measurement Type [Gamma-Nought] - Backscatter Expression Convention [linear amplitude or linear power*] - Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order <i>*Note: Transformation to the logarithm decibel scale is not required or desired as this step can be completed by the user if necessary.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> As threshold.		

3.1	Backscatter Measurements	[POL]	<u>Threshold (Minimum) Requirements [POL]</u> Measurements can be: <u>Normalised Radar Covariance Matrix (CovMat)</u> Diagonal (equivalent to [NRB]) and upper diagonal elements of the terrain-flattened Gamma-Nought (γ_T^0) Covariance Matrix are provided for coherent dual (e.g., HH-HV, VV-VH, or ...) and fully polarimetric (e.g., HH- HV-VH-VV) acquisitions. And/or <u>Polarimetric Radar Decomposition (PRD)</u> The individual components of the polarimetric decomposition obtained from the terrain-flattened (Gamma-Nought (γ_T^0)) covariance matrix. File format specifications/contents provided in metadata: - Measurement Type [CovMat/PRD] - Measurement convention unit [linear amplitude, linear power, angle] - Individual covariance matrix element or/and Individual component of the decomposition [C3m11, C3m12, ... or H, A, alpha, or ...] - Scaling Conversion Equation* - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/ Float/Complex, etc.] - Bits per Sample - Byte Order	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
-----	--------------------------	-------	--	---	-----

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			* Scaling Conversion Equation is required only for scaling upper diagonal elements of the covariance matrix from 8 bits or 16 bits to 32 bits format. <i>Note: It is recommended to keep CovMat or PRD measurement files separated. Otherwise, specify the multi-channel format order [BIP, BIL, BSQ]</i>		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> As threshold.		
3.1	Backscatter Measurements	[ORB]	<u>Threshold (Minimum) Requirements [ORB]</u> Geoid-corrected Sigma-Nought backscatter coefficient (σ^0) is provided for each polarization. File format specifications/contents provided in metadata: - Measurement Type [Sigma-Nought] - Backscatter Expression Convention [linear amplitude or linear power*] - Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order <i>*Note: Transformation to the logarithm decibel scale is not required or desired as this step can be easily completed by the user if necessary.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A
			<u>Goal (Desired) Requirements</u> Radiometrically Terrain-corrected Sigma-Nought backscatter coefficient (σ_T^0) is provided for each polarization.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
3.1	Backscatter Measurements	[GSLC]	<u>Threshold (Minimum) Requirements [GSLC]</u> Backscatter coefficient, in complex number format, is provided for each polarization (e.g., HH, HV, VV, VH). GSLC phase is terrain-flattened using Earth ellipsoid and digital elevation or surface models. File format specifications/contents provided in metadata: - Measurement Type [Gamma-Nought, Sigma-Nought or Beta-Nought] - Backscatter Expression Convention [linear amplitude] - Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order <i>*Note: Transformation to the logarithm decibel scale is not required or desired as this step can be easily completed by the user if necessary.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	N/A

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> Radiometric and Phase Terrain-flattened Gamma-Nought backscatter coefficient (γ_r^0), in complex number format, is provided for each polarization (e.g., HH, HV, VV, VH). File format specifications/contents provided in metadata: - Measurement Type [Gamma-Nought] - Backscatter Expression Convention [linear amplitude] - Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order		
3.1	Backscatter Measurements	[InSAR]	<u>Threshold (Minimum) Requirements</u> [InSAR] Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> <u>Terrain-flattened Radiometrically</u> <u>Terrain Corrected (RTC) Gamma-Nought</u> <u>backscatter coefficient (γ_r^0)</u> is provided for each polarization. File format specifications/contents provided in metadata: - Measurement Type [Gamma-Nought] - Source ID (e.g. item 1.6 acqID) - Backscatter Expression Convention [linear amplitude or linear power*] - Polarization [HH/HV/VV/VH, ...] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order *Note: Transformation to the logarithm decibel scale is not required or desired as this step can be completed by the user if necessary.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
3.2	Scaling Conversion	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> If applicable, indicate the equation to convert pixel linear amplitude/power to logarithmic decibel scale, including, if applicable, the associated calibration (dB offset) factor, and/or the equation used to convert compressed data (int8/int16/float16) to float32.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Not applicable. There are no scale factors to be applied. <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> As threshold, but use of float32.		
3.3	Noise Removal	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Flag if noise removal* has been applied (Y/N). Metadata should include the noise removal algorithm and reference to the algorithm as URL or DOI. <i>*Note: Thermal noise removal and image border noise removal to remove overall scene noise and scene edge artefacts, respectively.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> metadata/ceos_noise_removal description: Flag if noise removal* has been applied (Y/N). Metadata should include the noise removal algorithm and reference to the algorithm as URL or DOI. value: No <u>Other feedback:</u> ...	Verified at Threshold, Goal Level not assessed.
			<u>Goal (Desired) Requirements</u> As threshold.		

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
3.4	Radiometric Terrain Correction Algorithm	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Adjustments were made for terrain by modelling the local contributing scattering area using the preferred choice of a published peer-reviewed algorithm to produce radiometrically terrain corrected (RTC) γ_T^0 backscatter estimates. Metadata references, e.g.: - a citable peer-reviewed algorithm - technical documentation regarding the algorithm used to generate the backscatter estimates is expressed as URLs or DOIs - the sources of auxiliary data used to make corrections <i>Note: Examples of technical documentation include an Algorithm, Theoretical Basis Document, product user guide, etc.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
		[GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> As Threshold		
		[All]	Require resolution of DEM better than the output product resolution when applying terrain corrections.		
3.5	Radiometric Accuracy	[NRB] [POL] [ORB]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
		[GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> Uncertainty (e.g., bounds on γ^0 or σ^0) information is provided as document referenced as URL or DOI. SI traceability is achieved.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
3.6	Mean Wind-Normalised Backscatter	[ORB]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	N/A

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
	Measurements		<u>Goal (Desired) Requirements</u> Usage: Only for Maritime scene Mean wind-normalised (over ocean) backscatter coefficient is provided for each available polarization. It is calculated as the ratio between the backscatter intensity and a simulated backscatter intensity image generated using an ocean surface wind model such as, e.g., Quilfen <i>et al.</i> (1998) or Vachon and Dobson (2000) for VV and HH polarization respectively. File format specifications/contents provided in metadata: - Measurement Type [Wind-Normalised Backscatter] - Backscatter Expression Convention [intensity ratio] - Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order <i>Note: Reference wind model, wind speed and direction used for reference backscattering coefficient should be provided.</i>	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
3.7	Flattened Phase	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	N/A

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> Usage: Alternative to [GSLC] product for [NRB] and [POL] products The Flattened Phase is the interferometric phase for which the topographic phase contribution is removed. It is derived from the range-Doppler SLC product using a DEM and the orbital state vectors with respect to a reference orbit (see Annex A1.2). The use of the Flattened Phase with the [NRB] or [POL] intensity (3.1 Backscatter measurement) provides the [GSLC] equivalent, as follows: $GSLC = \sqrt{NRB} \times \exp(j \text{ FlattenPhase})$ File format specifications/contents provided in metadata: - Measurement Type [Flattened Phase] - Reference Polarization [HH/HV/VV/VH] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order In case of polarimetric data, indicate the reference polarization.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	

3.8	Coherence Image	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
			<u>Goal (Desired) Requirements</u> InSAR coherence image for each InSAR pair defined under 1.7.16. File format specifications/contents provided in metadata: - Measurement Type [Coherence] - insarID number - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, Complex Float ...] - Bits per Sample - Byte Order Coherence image statistics - Average - Standard deviation		
3.9	Interferogram Image	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

			<u>Goal (Desired) Requirements</u> Interferogram image for each InSAR pair defined under 1.7.16. Indicate if the InSAR simulated ellipsoid and topographic phases have been subtracted. File format specifications/contents provided in metadata: - Measurement Type [Interferogram] - insarID number - Subtracted Earth curvature phase flag [True/False] - Subtracted topographic phase flag [True/False] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
3.10	Unwrapped Interferogram	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

	Image		<u>Goal (Desired) Requirements</u> Unwrapped interferogram image for each InSAR pair defined under 1.7.16. File format specifications/contents provided in metadata: - Measurement Type [Unwrapped Interferogram] - insarID number - Component [Line of Sight, Vertical, East, North] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
3.11	InSAR Displacement	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	<u>Achieved level:</u> Threshold / Goal	Not Required

	Image		<u>Goal (Desired) Requirements</u> Displacement map image(s) could be expressed as a single cumulative displacement map or a temporal series of incremental displacement maps. File format specifications/contents provided in metadata: - Measurement Type [InSAR Cumulative Displacement or InSAR Incremental Displacement] - Measurement projection [Line of Sight, Vertical, Horizontal, East, North] - Interval start time - Interval end time - Reference Polarization* [HH/HV/VV/VH/RH/RL/...] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order *In case of polarimetric data, indicate the reference polarization.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
--	--------------	--	---	--	--

3.12	InSAR Displacement Residue Image	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Displacement residue map images for each source acquisition generated from displacement model. File format specifications/contents provided in metadata: - Measurement Type [Displacement residues] - Measurement projection [Line of Sight, Vertical, Horizontal, East, North] - Source ID - Reference Polarization* [HH/HV/VV/VH/RH/RL/...] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order *In case of polarimetric data, indicate the reference polarization.	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required
3.13	InSAR Displacement	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

	Rate Image		<u>Goal (Desired) Requirements</u> Mean linear displacement rate (velocity) estimate. File format specifications/contents provided in metadata: - Measurement Type [Displacement rate] - Measurement projection [Line of Sight, Vertical, Horizontal, East, North] - Interval start time - Interval end time - Rate (velocity) units [mm/year, cm/year, mm/month, ...] - Reference Polarization* [HH/HV/VV/VH/RH/RL/...] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order *In case of polarimetric data, indicate the reference polarization.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
--	------------	--	---	--	--

3.14	InSAR Displacement	[InSAR]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required
------	--------------------	---------	--	---	--------------

	Rate Model Fit Image		<u>Goal (Desired) Requirements</u> Goodness of fit for model defined in 3.13 File format specifications/contents provided in metadata: - Measurement Type [Model standard deviation, R-squared, RMSE ...] - Measurement projection [Line of Sight, Vertical, Horizontal, East, North] - Interval start time - Interval end time - Reference Polarization* [HH/HV/VV/VH/RH/RL/...] - Data Format [GeoTIFF/HDF5/NetCDF, ...] - Data Type [Int/Float, ...] - Bits per Sample - Byte Order *In case of polarimetric data, indicate the reference polarization.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
--	-----------------------------	--	---	--	--

Geometric Corrections

Geometric corrections are steps that are taken to place the measurement accurately on the surface of the Earth (that is, to geolocate the measurement) allowing measurements taken through time to be compared. This section specifies any geometric correction requirements that must be met in order for the data to be analysis ready.

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
4.1	Geometric Correction Algorithm	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Not required. <u>Goal (Desired) Requirements</u> Metadata references, e.g.: - A metadata citable peer-reviewed algorithm, - Technical documentation regarding the implementation of that algorithm expressed as URLs or DOIs - The sources of auxiliary data used to make corrections. - Resampling method used for geometric processing of the source data. <i>Note: Examples of technical documentation can include e.g., an Algorithm Theoretical Basis Document (ATBD), a product user guide.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
4.2	Digital Elevation Model	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Usage: For products including land areas a) During ortho-rectification, the data provider shall use the same DEM that was used for the radiometric terrain flattening to ensure consistency of the data stack. b) Provide reference to the Digital Elevation Model used for geometric terrain correction. c) Provide reference to Earth Gravitational Model (EGM) if used for geometric correction.	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> A:yes. B:identification/source_data_dem_name description: Name of Digital Elevation Model used during input data processing. value: Copernicus GLO-30 a static geotiff file is provided with the name of "dem_warped_utm.tif". <u>Other feedback:</u> ...	Verified at Threshold. EGM information found here: dem_egm_model: Earth Gravitational Model 2008 (EGM2008)
			<u>Goal (Desired) Requirements</u> a) A DEM with comparable or better resolution to the resolution of the output CEOS-ARD product shall be used if available. Else, the upsampled DEM is identified. b) Resampling method used for preparation of the DEM. c) Method used for resampling the EGM.		

4.3	Geometric Accuracy	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> Accurate geolocation is a prerequisite to radar processing to correct for terrain and to enable interoperability between radar sensors. The absolute geolocation error (ALE) for a sensor is typically assessed through analysis of Single Look Complex (SLC) imagery and measured along the slant range and azimuth directions (case A: SLC ALE). The end-to-end “ARD” ALE of the final CEOS-ARD product could be measured directly in the final image product in the chosen map projection, i.e., in the map coordinate directions: e.g., Northing and Easting (case B: ARD ALE). Providing accuracy estimates based on measurements following at least one scheme (A or B or both) meets the threshold requirement. Estimates of the ALE is provided as a bias and a standard deviation, with (Case A) SLC ALE expressed in slant range and azimuth, and (Case B) ARD ALE expressed in map projection dimensions. For [InSAR] products, specify the SAR acquisition used for geocoding. SAR acquisition could be different from the two source acquisitions of the product when a stack of acquisitions is processed simultaneously. <i>Note 1: This assessment is often made through comparison of measured corner reflector positions with their projected location in the imagery. In some cases, other mission calibration/validation results may be used.</i>	Achieved level: Threshold / Goal <u>Explanation / Justification:</u> Variable: metadata/ceos_absolute_geolocation_ground_range_bias units: meters description: Estimated mean absolute geolocation error for input geocoded SLCs, as assessed via corner reflector analysis, in the ground range direction value: -0.06 Variable: metadata/ceos_absolute_geolocation_ground_range_stddev units: meters description: Estimated standard deviation of absolute geolocation error for input geocoded SLCs, as assessed via corner reflector analysis, in the ground range direction value: 0.38 Variable: metadata/ceos_absolute_geolocation_azimuth_bias units: meters description: Estimated mean absolute geolocation error for input geocoded SLCs, as assessed via corner reflector analysis, in the azimuth direction	Verified at Threshold
-----	--------------------	--	--	---	-----------------------

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<i>Note 2: The ALE is not typically assessed for every processed image, but through an ALE assessment by the data processing team characterizing all or (usually a subset) of the generated products.</i> <i>Note 3: For new SAR missions, as long as calibration/validation reports are not available, values can be set to NaN and provide a DOI or URL link to pre-launch mission specification document.</i> <u>Goal (Desired) Requirements</u> Output product sub-sample accuracy should be less than or equal to 0.1 (slant range) pixel radial root mean square error (rRMSE).	value: -0.04 Variable: metadata/ceos_absolute_geolocation_azimuth_stddev units: meters description: Estimated standard deviation of absolute geolocation error for input geocoded SLCs, as assessed via corner reflector analysis, in the azimuth direction value: 0.46 <u>Other feedback:</u> ...	
4.4	Geometric Refined	[NRB] [POL]	<u>Threshold (Minimum) Requirements</u> Not required.	Achieved level: Threshold / Goal	Not Required

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
	Accuracy	[ORB] [GSLC] [InSAR]	<u>Goal (Desired) Requirements</u> Values provided under 4.3 Geometric accuracy are provided by the SAR mission Cal/Val team. CEOS-ARD processing steps could include method refining the geometric accuracy, such as cross-correlation of the SAR data in slant range with a SAR scene simulated from a DSM or DEM. Methodology used (name and reference), quality flag, geometric standard deviation values should be provided.	<u>Explanation / Justification:</u> ... <u>Other feedback:</u> ...	
4.5	Gridding Convention	[NRB] [POL] [ORB] [GSLC] [InSAR]	<u>Threshold (Minimum) Requirements</u> A consistent gridding/sampling frame is used. The origin is chosen to minimise any need for subsequent resampling between multiple products (be they from the same or different providers). This is typically accomplished via a “snap to grid” in relation to the most proximate grid tile in a global system*. <i>* If a product hierarchy of resolutions exists (or is planned), the multiple resolutions should nest within each other (e.g., 12.5m, 25m, 50m, 100m, etc.), and not be disjoint.</i>	<u>Achieved level:</u> Threshold / Goal <u>Explanation / Justification:</u> <pre> metadata/ceos_gridding_convention description: Whether a consistent gridding/sampling frame is used for ascending/descending frames. value: Snap to grid </pre>	Verified at Threshold

#	Parameter	CEOS-ARD product	Requirements	Self-Assessment	Remarks/ Requirements/ Modifications
			<u>Goal (Desired) Requirements</u> Provide DOI or URL to gridding convention used. When multiple providers share a common map projection, providers are encouraged to standardise the origins of their products among each other. In the case of UTM/UPS coordinates, the upper left corner coordinates should be set to an integer multiple of sample intervals from a 100 km by 100 km grid tile of the Military Grid Reference System's 100k coordinates ("snap to grid"). For products presented in geographic coordinates (latitude and longitude), the origin should be set to an integer multiple of samples in relation to the closest integer degree.	<u>Other feedback:</u> ...	

Summary Self-Assessment Table

			Threshold	Goal
1	CEOS-ARD product	General Metadata		
1.1	[ALL]	Traceability	Not Required	Not Assessed
1.2	[ALL]	Metadata Machine Readability	Yes	Not Assessed
1.3	[ALL]	Product Type	Yes	Not Assessed
1.4	[ALL]	Document Identifier	Yes	Not Assessed
1.5	[ALL]	Data Collection Time	Yes	Not Assessed
1.6		Source Data Attributes		
1.6.1	[ALL]	Source Data Access	Yes	Not Assessed
1.6.2	[ALL]	Instrument	Yes	Not Assessed
1.6.3	[ALL]	Source Data Acquisition Time	Yes	Not Assessed
1.6.4	[ALL]	Source Data Acquisition Parameters	Yes	Not Assessed
1.6.5	[ALL]	Source Data Orbit Information	Yes	Not Assessed
1.6.6	[ALL]	Source Data Processing Parameters	Yes	Not Assessed
1.6.7	[ALL]	Source Data Image Attributes	Yes	Not Assessed
1.6.8	[ALL]	Sensor Calibration	Not Required	Not Assessed
1.6.9	[ALL]	Performance Indicators	Yes	Not Assessed
1.6.10	[ALL]	Source Data Polarimetric Calibration Matrices	Not Required	Not Assessed
1.6.11	[ALL]	Mean Faraday Rotation Angle	Not Required	Not Assessed
1.6.12	[ALL]	Ionosphere indicator	Not Required	Not Assessed
1.7		CEOS-ARD Product Attributes		
1.7.1	[ALL]	Product Data Access	Yes	Not Assessed
1.7.2	[ALL]	Auxiliary Data	Not Required	Not Assessed
1.7.3	[ALL]	Product Sample Spacing	Yes	Not Assessed

1.7.4	[NRB] [POL] [ORB] [InSAR]	Product Equivalent Number of Looks	Not Required	Not Assessed
1.7.5	[ALL]	Product Resolution	Not Required	Not Assessed
1.7.6	[NRB] [POL] [ORB]	Product Filtering	Not Product Relevant	Not Relevant
1.7.7	[ALL]	Product Bounding Box	Yes	Not Assessed
1.7.8	[ALL]	Product Geographical Extent	Yes	Not Assessed
1.7.9	[ALL]	Product Image Size	Yes	Not Assessed
1.7.10	[ALL]	Product Pixel Coordinate Convention	Yes	Not Assessed
1.7.11	[ALL]	Product Coordinate Reference System	Yes	Not Assessed
1.7.12	[ORB]	Look Direction Polynomials	Not Product Relevant	Not Relevant
1.7.13	[GSLC] [InSAR]	Radar Unit Look Vector	Yes	Not Assessed
1.7.14	[GSLC]	Slant Range Sensor to Surface	Not Product Relevant	Not Relevant
1.7.15	[NRB] [POL] [GSLC]	Reference Orbit	Not Product Relevant	Not Relevant
1.7.16	[InSAR]	InSAR Pair	Yes	Not Assessed
1.7.17	[InSAR]	InSAR Pair Co registration	Yes	Not Assessed
			Threshold	Goal
1.7.18	[InSAR]	Coherence	Yes	Not Assessed
1.7.19	[InSAR]	Interferogram Filtering	Yes	Not Assessed
1.7.20	[InSAR]	Phase Unwrapping	Yes	Not Assessed
1.7.21	[GSLC] [InSAR]	Atmospheric Phase Correction	Not required	Not Assessed

1.7.22	[GSLC] [InSAR]	Ionospheric Phase Correction	Not required	Not Assessed
1.7.23	[InSAR]	Displacement Modelling	Not required	Not Assessed
			Threshold	Goal
2	CEOS-ARD product	Per-Pixel Metadata		
2.1	[ALL]	Metadata Machine Readability	Yes	Not Assessed
2.2	[ALL]	Data Mask Image	Yes	Not Assessed
2.3	[ALL]	Scattering Area Image	Not Required	Not Assessed
2.4	[NRB] [POL] [ORB] [GSLC]	Local Incident Angle Image	Not Product Relevant	Not Relevant
2.5	[ALL]	Ellipsoidal Incident Angle Image	Yes	Not Assessed
2.6	[ALL]	Noise Power Image	Not Required	Not Assessed
2.7	[NRB] [POL] [GSLC]	Gamma-to-Sigma Ratio Image	Not Required	Not Assessed
2.8	[ALL]	Acquisition ID Image	Not Required	Not Assessed
2.9	[NRB] [POL] [GSLC] [InSAR]	Per-pixel DEM	Not Required	Not Assessed
2.10	[ORB]	Per-pixel Geoid	Not Product Relevant	Not Relevant
2.11	[ORB]	Look Direction Image	Not Product Relevant	Not Relevant
2.12	[GSLC] [InSAR]	Radar Unit Look Vector Grid Image	Yes	Not Assessed
2.13	[GSLC] [InSAR]	Slant Range Sensor to Surface Image	Not Required	Not Assessed
2.14	[GSLC] [InSAR]	InSAR Phase Uncertainty Image	Not Required	Not Assessed

2.15	[GSLC] [InSAR]	Atmospheric Phase Correction Image	Not Required	Not Assessed
2.16	[GSLC] [InSAR]	Ionospheric Phase Correction Image	Not Required	Not Assessed
2.17	[InSAR]	Simulated Topographic Phase	Not Required	Not Assessed
2.18	[InSAR]	InSAR Perpendicular Baseline	Not Required	Not Assessed
2.19	[InSAR]	InSAR Parallel Baseline	Not Required	Not Assessed
2.20	[InSAR]	InSAR Displacement Model Points	Not Required	Not Assessed
			Threshold	Goal
3	CEOS-ARD product	Radiometrically Corrected Measurements		
3.1	[ALL]	Backscatter Measurements	Not Required	Not Assessed
3.2	[ALL]	Scaling Conversion	Not Required	Not Assessed
3.3	[ALL]	Noise Removal	Yes	Not Assessed
3.4	[NRB] [POL] [GSLC] [InSAR]	Radiometric Terrain Correction Algorithms	Not Required	Not Assessed
3.5	[ALL]	Radiometric Accuracy	Not Required	Not Assessed
3.6	[ORB]	Mean Wind-Normalised Backscatter Measurements	Not Product Relevant	Not Relevant
3.7	[NRB] [POL]	Flattened Phase	Not Product Relevant	Not Relevant
3.8	[InSAR]	Coherence Image	Not Required	Not Assessed
3.9	[InSAR]	Interferogram Image	Not Required	Not Assessed
3.10	[InSAR]	Unwrapped Interferogram Image	Not Required	Not Assessed
3.11	[InSAR]	InSAR Displacement Image	Not Required	Not Assessed
3.12	[InSAR]	InSAR Displacement Residue Image	Not Required	Not Assessed
3.13	[InSAR]	InSAR Displacement Rate Image	Not Required	Not Assessed
3.14	[InSAR]	InSAR Displacement Rate Model fit Image	Not Required	Not Assessed

			Threshold	Goal
4	CEOS-ARD product	Geometric Corrections		
4.1	[ALL]	Geometric Correction Algorithms	Not Required	Not Assessed
4.2	[ALL]	Digital Elevation Model	Yes	Not Assessed
4.3	[ALL]	Geometric Accuracy	Yes	Not Assessed
4.4	[ALL]	Geometric Refined Accuracy	Not Required	Not Assessed
4.5	[ALL]	Gridding Convention	Yes	Not Assessed

Guidance

This section aims to provide background and specific information on the processing steps that can be used to achieve analysis ready data for a specific and well-developed Product Family Specification. This Guidance material does not replace or override the specifications.

Introduction to CEOS-ARD

What is CEOS Analysis Ready Data?

CEOS-ARD are products that have been processed to a minimum set of requirements and organized into a form that allows immediate analysis with a minimum of additional user effort. In general, these products would be resampled onto a common geometric grid (for a given product) and would provide baseline data for further interoperability both through time and with other datasets.

CEOS-ARD products are intended to be flexible and accessible products suitable for a wide range of users for a wide variety of applications, including particularly time series analysis and multi-sensor application development. They are also intended to support rapid ingestion and exploitation via high-performance computing, cloud computing and other future data architectures. They may not be suitable for all purposes and are not intended as a ‘replacement’ for other types of satellite products.

When can a product be called CEOS-ARD?

The CEOS-ARD branding is applied to a particular product once:

- that product has been assessed as meeting CEOS-ARD requirements by the agency responsible for production and distribution of the product, and
- that the assessment has been peer reviewed by the relevant CEOS team(s).

Agencies or other entities considering undertaking an assessment process should consult the CEOS-ARD [Governance Framework](#).

A product can continue to use CEOS-ARD branding as long as its generation and distribution remain consistent with the peer-reviewed assessment.

What is the difference between Threshold and Goal?

Threshold (Minimum) Requirements are the MINIMUM that is needed for the data to be analysis ready. This must be practical and accepted by the data producers.

Goal (Desired) Requirements (previously referred to as “Target”) are the ideal; where we would like to be. Some providers may already meet these.

Products that meet all threshold requirements should be immediately useful for scientific analysis or decision-making.

Products that meet goal requirements will reduce the overall product uncertainties and enhance broad-scale applications. For example, the products may enhance interoperability or provide increased accuracy through additional corrections that are not reasonable at the *threshold* level.

Goal requirements anticipate continuous improvement of methods and evolution of community expectations, which are both normal and inevitable in a developing field. Over time, *goal* specifications may (and subject to due process) become accepted as Threshold requirements.

Reference Papers [CEOS-ARD for SAR]

ISO 19115-2 (2009) *Geographic information -- Metadata -- Part 2: Extensions for imagery and gridded data*, www.iso.org/standard/39229.html

Normalised Radar Backscatter [NRB]

Shiroma, G.H.X., M. Lavalle and S. M. Buckley, *An Area-Based Projection Algorithm for SAR Radiometric Terrain Correction and Geocoding*. *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1-23, 2022, Art no. 5222723, doi: 10.1109/TGRS.2022.3147472.

Small, D. (2011) *Flattening Gamma: Radiometric Terrain Correction for SAR Imagery*, *IEEE Trans. Geosci. Remote Sens.*, vol. 49, no. 8, pp. 3081-3093. doi: 10.1109/TGRS.2011.2120616

Polarimetric Radar [POL]

Cameron, W.L., N.N. Youssef, and L.K. Leung (1996) *Simulated polarimetric signatures of primitive geometrical shapes*, *IEEE Trans. Geosci. Remote Sens.*, vol. 34, no. 3, pp. 793–803.

Cloude, S.R. and E. Pottier (1996) *A review of target decomposition theorems in radar polarimetry*, *IEEE Trans. Geosci. Remote Sens.*, vol. 34, no. 2, pp. 498–518.

Freeman, A. and S.L. Durden (1998) *A three-component scattering model for polarimetric SAR data*, *IEEE Trans. Geosci. Remote Sens.*, vol. 36, no. 3, pp. 964–973.

Gens, R., D.K. Atwood and E. Pottier (2013) *Geocoding of polarimetric processing results: Alternative processing strategies*, *Remote Sensing Letters*, vol. 4, no. 1, pp. 38-44.

Krogager, E. (1993) *Aspects of polarimetric radar imaging*, Ph.D. dissertation, Tech. Univ. Denmark, Electromagn. Inst., Lyngby, Denmark

Lee, J.-S., J.-H. Wen, T.L. Ainsworth, K.-S. Chen, and A.J. Chen (2009) *Improved Sigma Filter for Speckle Filtering of SAR Imagery* *IEEE Trans. Geosci. Remote Sens.*, vol. 47, no. 1, pp. 202-213.

Raney, R.K., J.T.S. Cahill, G.W. Patterson and D.B.J. Bussey (2012) *The m-chi decomposition of hybrid dual-polarimetric radar data with application to lunar craters* *Journal of Geophysical Research: Planets* 117(E5)

Toutin, T., H. Wang, P. Chomaz and E. Pottier (2013) *Orthorectification of Full-Polarimetric Radarsat-2 Data Using Accurate LIDAR DSM*, *IEEE Trans. Geosci. Remote Sens.*, vol. 51, no. 12, pp. 5252-5258.

Yamaguchi, Y., A. Sato, W.M. Boerner, R. Sato and H. Yamada (2011) *Four-Component Scattering Power Decomposition with Rotation of Coherency Matrix*, *IEEE Trans. Geosci. Remote Sens.*, vol. 49, no. 6, pp. 2251-2258.

Ocean Radar Backscatter [ORB]

Quilfen, Y., Chapron, B., Elfouhaily, T., Katsaros, K., and Tournadre, J. (1998) *Observation of tropical cyclones by high-resolution scatterometry*, *J. Geophys. Res.*, 103(C4), 7767– 7786, doi:10.1029/97JC01911

Vachon, P.W. and F.W. Dobson (2000) *Wind Retrieval from RADARSAT SAR Images: Selection of a Suitable C-Band HH Polarization Wind Retrieval Model*, *Canadian Journal of Remote Sensing*, 26:4, 306-313, DOI: 10.1080/07038992.2000.10874781

Geocoded Single-Look Complex [GSLC]

Zebker, H. A., S. Hensley, P. Shanker and C. Wortham (2010) *Geodetically Accurate InSAR Data Processor*, *IEEE Transactions on Geoscience and Remote Sensing*, vol. 48, no. 12, pp. 4309-4321, Dec. 2010, doi: 10.1109/TGRS.2010.2051333.

Zebker, H. A. (2017) *User-Friendly InSAR Data Products: Fast and Simple Timeseries Processing*. *IEEE Geoscience and Remote Sensing Letters* 14(11): 2122-2126.

Zheng, Y. and H. A. Zebker (2017) *Phase Correction of Single-Look Complex Radar Images for User-Friendly Efficient Interferogram Formation*. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 10(6): 2694-2701.

Interferometric Synthetic Aperture Radar [InSAR]

Lanari, R., O. Mora, M. Manunta, J. J. Mallorqui, P. Berardino and E. Sansosti, "A small-baseline approach for investigating deformations on full-resolution differential SAR interferograms," in *IEEE Transactions on Geoscience and Remote Sensing*, vol. 42, no. 7, pp. 1377-1386, July 2004, doi: 10.1109/TGRS.2004.828196.

Ferretti, A., A. Fumagalli, F. Novali, C. Prati, F. Rocca and A. Rucci, "A New Algorithm for Processing Interferometric Data-Stacks: SqueeSAR," in *IEEE Transactions on Geoscience and Remote Sensing*, vol. 49, no. 9, pp. 3460-3470, Sept. 2011, doi: 10.1109/TGRS.2011.2124465.

Annex 1

A1.1: General Processing Roadmap

The radiometric interoperability of CEOS-ARD SAR products is ensured by a common processing chain during production. The recommended processing roadmap involves the following steps:

- Apply the best possible orbit parameters to give the most accurate product possible. These will have been projected to an ellipsoidal model such as WGS84. To achieve the level of geometric accuracy required for the DEM-based correction, precise orbit determination will be required.
- Apply instrument calibration to produce Beta-Nought values with high fidelity.
- Convert Single-Look-Complex (SLC) radiometric channel(s) to intensity **[NRB]**, **[ORB]** and **[POL]** and in addition for **[POL]**, the cross-product element(s) of the covariance as shown in Annex 2.1.
- Perform radiometric terrain correction (gamma backscatter convention terrain-flattening) on the covariance matrix by applying the local surface normalisation factor to each backscatter measurement element (Small, 2011; Shiroma *et al.*, 2022).
- Perform polarimetric speckle filtering (optional for **[NRB]** and **[ORB]**), before geocoding, to optimally preserve the polarimetric information. Most popular polarimetric decomposition methodologies are incoherent in nature, which requires averaging the covariance matrix for stationarity. Depending on the application, a polarimetric filter that preserves local point targets and locally average extended targets may be used, e.g., Sigma Lee filter with 7x7 window and 3-point target (Lee *et al.*, 2009). Multi-looking could be performed to meet optimal output sample spacing before the geometric correction step. No speckle filtering or multi-looking is performed for **[GSLC]** products.
- For **[GSLC]** products, the topographic phase is estimated relative to a reference orbit and removed from the SLC data (Zebker *et al.*, 2010; Zebker, 2017) (see Annex A1.2)
- Geometric terrain correction (relative to geoid for **[ORB]**) is applied to the normalized backscatter measurement data. For **[POL]**, the resampling methodology should be nearest-neighbour, bilinear or average in order to preserve integrity of the covariance matrix as other resampling functions can introduce artefacts due to the mix of intensity and complex number elements in the matrix. Geocoding to a common grid structure with specified pixel spacings for true data cube format.
- Generate CEOS format metadata to accompany product layers.
- Optionally, a SpatioTemporal Asset Catalog (STAC) file is added to the product.

Table A1.1 lists possible sequential steps and existing software tools (e.g., Gamma software (GAMMA, 2018)) and scripting tasks that can be used to form the CEOS-ARD SAR processing roadmap.

**Table A1.1 SAR ARD processing roadmap and software options. RADARSAT-2
Example**

Step	Implementation option
1. Orbital data refinement	Check xml date and delivered format. RADARSAT-2, pre EDOT (July 2015) replace. Post July 2015, check if 'DEF', otherwise replace. (Gamma - RSAT2_vec)
2. Apply radiometric scaling Look-Up Table (LUT) to Beta-Nought	Specification of LUT on ingest. (Gamma - par_RSAT2_SLC/SG)
3. Generate covariance matrix elements	Gamma – COV_MATRIX
4. Radiometric terrain normalisation	Gamma - geo_radcal2
5. Speckle filtering (Boxcar or Sigma Lee)	Custom scripting
6. Geometric terrain correction/Geocoding	Gamma – gc_map and geocode_back
7. Create metadata	Custom scripting

A1.2: Topographic phase removal

InSAR analysis capabilities from CEOS-ARD SAR products are enabled with **[GSLC]** products, which is also the case when the Flattened Phase per-pixel data (item 3.7) are included in the **[NRB]** or **[POL]** products. This is made possible since the simulated topographic phase relative to a given reference orbit has been subtracted.

From classical approach with SLC data, interferometric phase $\Delta\varphi_{1-2}$ between two SAR acquisitions is composed of a topographic phase $\Delta\varphi_{Topo_{1-2}}$, a surface displacement phase $\Delta\varphi_{Disp_{1-2}}$ and other noise terms $\Delta\varphi_{Noise_{1-2}}$ (Eq. A1.1). The topographic phase consists to the difference in geometrical path length from each of the two antenna positions to the point on the SAR image (φ_{DEM_SLC}) and is a function of their orbital baseline distance (Eq. A1.2). The surface displacement phase is related to the displacement of the surface that occurred in between the two acquisitions. The noise term is the function of the radar signal interaction with the atmosphere and the ionosphere during each acquisition and function of the system noise.

$$\Delta\varphi_{1-2} = \Delta\varphi_{Topo_{1-2}} + \Delta\varphi_{Disp_{1-2}} + \Delta\varphi_{Noise_{1-2}} \quad \text{Eq. A1.1}$$

Where

$$\Delta\varphi_{Topo_{1-2}} = \varphi_{DEM_SLC_1} - \varphi_{DEM_SLC_2} \quad \text{Eq. A1.2}$$

Since CEOS-ARD products are already geocoded, it is important to remove the wrapped simulated topographic phase φ_{SimDEM_SLC} from the data in slant range (Eq. A1.3) during their production, before the geocoding step. The key here is to simulate the topographic phase relatively to a constant reference orbit, as done in a regular InSAR processing. There are two different ways to simulate the topographic phase:

- 1- The use of a virtual circular orbit above a nonrotating planet (Zebker *et al.*, 2010)
- 2- The use of a specific orbit cycle or a simulated orbit of the SAR mission

In both cases, the InSAR topographic phase $\Delta\varphi_{Topo_OrbRef-2}$ is simulated against the position of a virtual sensor φ_{DEM_OrbRef} lying on a reference orbit, instead of being simulated relatively to an existing reference SAR acquisition ($\varphi_{DEM_SLC_1}$). The use of a virtual circular orbit is a more robust approach since the reference orbit is defined at a fixed height above scene nadir and assuming the reference orbital height constant for all CEOS-ARD products. While with the second approach, the CEOS-ARD data producer must select a specific archived orbit cycle of the SAR mission or define a simulated one, from which the relative orbit, matching the one of the SAR acquisitions to be processed (to be converted to CEOS-ARD), is defined as the reference orbit. With this second approach, it is important to always use the same orbit cycle (or simulated orbit) for all the CEOS-ARD produced for a mission, in order to preserve the relevant compensated phase in between them. Providing absolute reference orbit number information in the metadata (item 1.7.15) allows users to validate the InSAR feasibility in between CEOS-ARD products.

$$\varphi_{Flattened_SLC_2} = \varphi_{SLC_2} - \Delta\varphi_{Topo_OrbRef-2} \quad \text{Eq. A1.3}$$

This procedure is equivalent to bring the position of the sensor platform of all the SAR acquisitions at the same orbital position (i.e., zeros baseline distance in between), which results in a Flattened phase $\varphi_{Flattened_SLC}$, independent of the local topography.

The phase subtraction could be performed by using a motion compensation approach (Zebker *et al.*, 2010) or directly on the SLC data. Then the geometrical correction is performed on the Flattened SLC, which results in a **[GSLC]** product.

[GSLC] can also be saved as a **[NRB]** product by including the Flattened Phase per-pixel data (item 3.7) as follows:

$$NRB: \gamma_T^o = |GSLC|^2$$

$$Flattened \text{ Phase: } \varphi_{Flattened} = \arg (GSLC)$$

For the **[POL]** product, the Flattened Phase (item 3.7) is defined for a specific polarisation. Since off-diagonal elements of the covariance matrix contain the relative phase between two polarizations, other polarization(s) Flattened Phase can be estimated by subtracting the complex number phase of the off-diagonal elements from reference polarization Flattened phase. As for example, if the reference Flattened Phase is for HH polarization (φ_{HH}), then the Flattened Phase for VV polarization is $\varphi_{VV} = \varphi_{HH} - \arg(HHVV^*)$. Nonetheless, since the elements of the covariance matrix have been averaged, providing individual polarization Flattened Phase images under 3.7 is more accurate.

InSAR from [GSLC] Demonstration:

From CEOS-ARD flattened SAR products, InSAR processing can be easily performed without dealing with topographic features and orbital sensor position, as for example with two **[GSLC]** products

$$\begin{aligned} \varphi_{Flattened_GSLC_1} &= \varphi_{SLC_1} - \Delta\varphi_{Topo_OrbRef-1} = \varphi_{SLC_1} - \varphi_{DEM_OrbRef} - \varphi_{DEM_SLC_1} \\ \varphi_{Flattened_GSLC_2} &= \varphi_{SLC_2} - \Delta\varphi_{Topo_OrbRef-2} = \varphi_{SLC_2} - \varphi_{DEM_OrbRef} - \varphi_{DEM_SLC_2} \end{aligned} \quad \text{Eq. A1.4}$$

The differential phase is

$$\Delta\varphi_{CARD_1-CARD_2} = \varphi_{Flattened_GSLC_1} - \varphi_{Flattened_GSLC_2} \quad \text{Eq. A1.5}$$

Which can be expanded using (Eq. A1.3)

$$\begin{aligned} \Delta\varphi_{CARD_1-CARD_2} &= (\varphi_{SLC_1} - \varphi_{DEM_OrbRef} - \varphi_{DEM_SLC_1}) \\ &\quad - (\varphi_{SLC_2} - \varphi_{DEM_OrbRef} - \varphi_{DEM_SLC_2}) \end{aligned} \quad \text{Eq. A1.6}$$

$$\Delta\varphi_{CARD_1-CARD_2} = (\varphi_{SLC_1} - \varphi_{SLC_2}) - (\varphi_{DEM_SLC_1} - \varphi_{DEM_SLC_2}) \quad \text{Eq. A1.7}$$

$$\Delta\varphi_{CARD_1-CARD_2} = \Delta\varphi_{SLC_1-SLC_2} - \Delta\varphi_{Topo_1-2} \quad \text{Eq. A1.8}$$

Where $\Delta\varphi_{SLC_1-SLC_2}$ can be expressed as Eq. A1.1, which gives

$$\Delta\varphi_{CARD_1-CARD_2} = (\Delta\varphi_{Topo_1-2} + \Delta\varphi_{Disp_1-2} + \Delta\varphi_{Noise_1-2}) - \Delta\varphi_{Topo_1-2} \quad \text{Eq. A1.9}$$

Consequently, the differential phase of two CEOS-ARD products doesn't contain a topographic phase and is already unwrapped (at least over stable areas). It is only function of the surface displacement and of the noise term. Depending on the reference DEM and the satellite orbital state vector accuracies, some residual topographic phase could be present. Atmospheric (item 2.15) and ionospheric (item 2.16) phase corrections could be performed during the production of CEOS-ARD products, which reduces the differential phase noise in an InSAR analysis.

$$\Delta\varphi_{CARD_1-CARD_2} = \Delta\varphi_{Disp_1-2} + \Delta\varphi_{Noise_1-2} \quad \text{Eq. A1.10}$$

Annex 2: Polarimetric Radar [POL]

A2.1: Normalised Covariance Matrices (CovMat)

In order to preserve the inter-channel polarimetric phase and thus the full information content of coherent dual-pol and fully polarimetric data, the covariance matrix is proposed as the data storage format. Covariance matrices are generated from the complex cross product of polarimetric channels, as shown in Eq. A2.1 for fully polarimetric data (C3) and in Eq. A2.2 for dual polarization data (C2). Since these matrices are complex symmetrical, only the upper diagonal elements (bold elements) need to be stored in the ARD database.

Fully polarimetric

$$C3 = \begin{bmatrix} |HH|^2 & \sqrt{2} \cdot HH \cdot HV^* & HH \cdot VV^* \\ \sqrt{2} \cdot HV \cdot HH^* & \mathbf{2 \cdot |HV|^2} & \sqrt{2} \cdot HV \cdot VV^* \\ VV \cdot HH^* & \sqrt{2} \cdot VV \cdot HV^* & |VV|^2 \end{bmatrix} \quad \text{Eq. A2.1}$$

Where $HV = VH$, under the reciprocity assumption. $| |$ and $*$ mean respectively complex modulus and the complex conjugate.

Dual polarization

HH-HV

$$C2 = \begin{bmatrix} |HH|^2 & HH \cdot HV^* \\ HV \cdot HH^* & |HV|^2 \end{bmatrix} \quad \text{or}$$

VV-VH

$$C2 = \begin{bmatrix} |VH|^2 & VH \cdot VH^* \\ VH \cdot VH^* & |VV|^2 \end{bmatrix} \quad \text{or}$$

Eq. A2.2

CH-CV

$$C2 = \begin{bmatrix} |CH|^2 & CH \cdot CV^* \\ CV \cdot CH^* & |CV|^2 \end{bmatrix}$$

Where CH and CV refer to dual polarization transmitting a circular polarized signal. [CH, CV] can be replaced by [LH, LV] or [RH, RV] for left (L) or right (R) hand circular transmission respectively, although RCM will offer only right-hand circular transmission. The coherent HH-VV configuration available on TerraSAR-X could also be represented as C2 format.

Polarimetric decomposition methods like Yamaguchi *et al.* (2011) for fully polarimetric, or m-chi (Raney *et al.*, 2012) for compact polarimetric data, can be applied directly on averaged (speckle filtered) C3 and C2 matrices respectively. These decompositions enhance scattering information, bring it to a more comprehensible level to end-users, and raise the performance of thematic classification methodologies. For SAR products that were acquired with single polarization the use of the covariance matrix does not result in superfluous storage requirements, since only the matrix elements that are populated are retained and the diagonal matrix elements are the backscatter intensities. Thus, a single channel intensity product would yield only one matrix element and the storage needs would not change.

In order to ease the data structure and the metadata in between C3 and C2, Eq. A2.1 should be redefined as Eq. A2.3. Users will have to take care of this non-standard representation when

applying their polarimetric analytic tools. “< >” means that ARD matrix elements are speckle filtered. Eq. A2.3 is valid both for dual-linear and fully polarimetric dataquad polarization.

$$C3 \text{ modified } C3m = \begin{bmatrix} \langle |HH|^2 \rangle & \langle HH \cdot HV^* \rangle & \langle HH \cdot VV^* \rangle \\ \langle HV \cdot HH^* \rangle & \langle |HV|^2 \rangle & \langle HV \cdot VV^* \rangle \\ \langle VV \cdot HH^* \rangle & \langle VV \cdot HV^* \rangle & \langle |VV|^2 \rangle \end{bmatrix} \quad \text{Eq. A2.3}$$

Furthermore, for compact polarimetric data, it is recommended to store them, by simple transformation, under the circular-circular basis, since RR and RL polarizations (Eq. A2.4) permit faster and more intuitive RGB visualizations (R=RR, G=RR/(RR+RL), B= RL).

$$\text{CH-CV} \quad \text{C2 circular } C2c = \begin{bmatrix} \langle |RR|^2 \rangle & \langle RR \cdot RL^* \rangle \\ \langle RL \cdot RR^* \rangle & \langle |RL|^2 \rangle \end{bmatrix} \quad \text{Eq. A2.4}$$

A2.2: Polarimetric Radar Decomposition (PRD)

Different methodologies allow decomposition of coherent dual-polarization data or fully polarimetric data to meaningful components summarizing the scattering processing with the interacting media. Decomposition techniques are divided in two categories: Coherent and incoherent.

1. **Coherent decompositions** express the scattering matrix by the summation of elementary objects of known signature (ex.: a sphere, a diplane, a cylinder, a helix, ...). They are used mainly to describe point targets which are coherent. As for examples, coherent PRD could be (but not limited to):

- a. Pauli decomposition (3 layers)

$|\alpha|^2$: sphere (odd-bounce interaction) [Intensity]

$|\beta|^2$: 0° diplane (even-bounce interaction) [Intensity]

$|\gamma|^2$: 45° diplane (volumetric interaction) [Intensity]

- b. Krogager decomposition (5 layers) (Krogager, 1993)

$|\kappa_\sigma|^2$: sphere (odd-bounce interaction) [Intensity]

$|\kappa_\delta|^2$: diplane (odd-bounce interaction) [Intensity]

$|\kappa_\eta|^2$: helix [Intensity]

θ : orientation angle [degrees]

φ_s : sphere to diplane angle [degrees]

- c. Cameron (nine classes) – non-dimensional layers (Cameron *et al.*, 1996)

Table A2.1

Classes	ID
Trihedral	1
Dihedral	2
Narrow Dihedral	3
Dipole	4
Cylinder	5
$\frac{1}{4}$ wave	6
Right Helix	7
Left Helix	8
Asymmetrical	9

2. **Incoherent decompositions** describe distributed targets in terms of scattering mechanisms and their diversity. They are generated from averaged Covariance, Coherence or Kennaugh matrices. As for examples, incoherent PRD could be (but not limited to):

- a. Based and saved on intensity of scattering mechanisms can be (Freeman and Durden, 1998; Yamaguchi *et al.*, 2011; Raney *et al.*, 2012)

Table A2.2

Level 2b - Layers [Intensity]	Incoherent Decompositions		
	Freeman-Durden	Yamaguchi	m-chi
Odd-bounce (surface/trihedral)	X	X	X
Even-bounce (dihedral)	X	X	X
Random (volumetric)	X	X	X
Helix		X	

- b. Based on eigenvector-eigenvalue decomposition expressing the diversity of scattering mechanisms (Cloude and Pottier, 1996) and types:

H : Entropy [] is the polarization diversity

A : Anisotropy [] is weighted difference between the 2nd and 3rd eigenvalues

α : Odd-even bounce angle [Degrees]

β : orientation angle [Degrees]

A2.3: Polarimetric Radar Decomposition Product Examples

From fully polarimetric covariance matrix ARD format [**CovMat**] (Level-2a), it is possible to apply any version of the popular Yamaguchi methodology, which decomposes the polarimetric information under relative intensities of 4 scattering types: Odd bounce, Even bounce, Random (volume) and helix. Figure A2.1b) shows HH intensity of a RADARSAT fully polarimetric acquired over a Spanish area. Decomposition using Yamaguchi methodology (Yamaguchi *et al.*, 2011) can be expressed in RGB colour composite (Figure A2.1c) where Red channel refers to even bounce scattering like urban area; Green channel is random scattering like vegetation; and Blue channel is odd bounce scattering like bare soil. Figure A2.1d) is equivalent to c) where radiometric normalisation (terrain flattening) has been applied with the help of the DEM of the scene (Figure A2.1a).

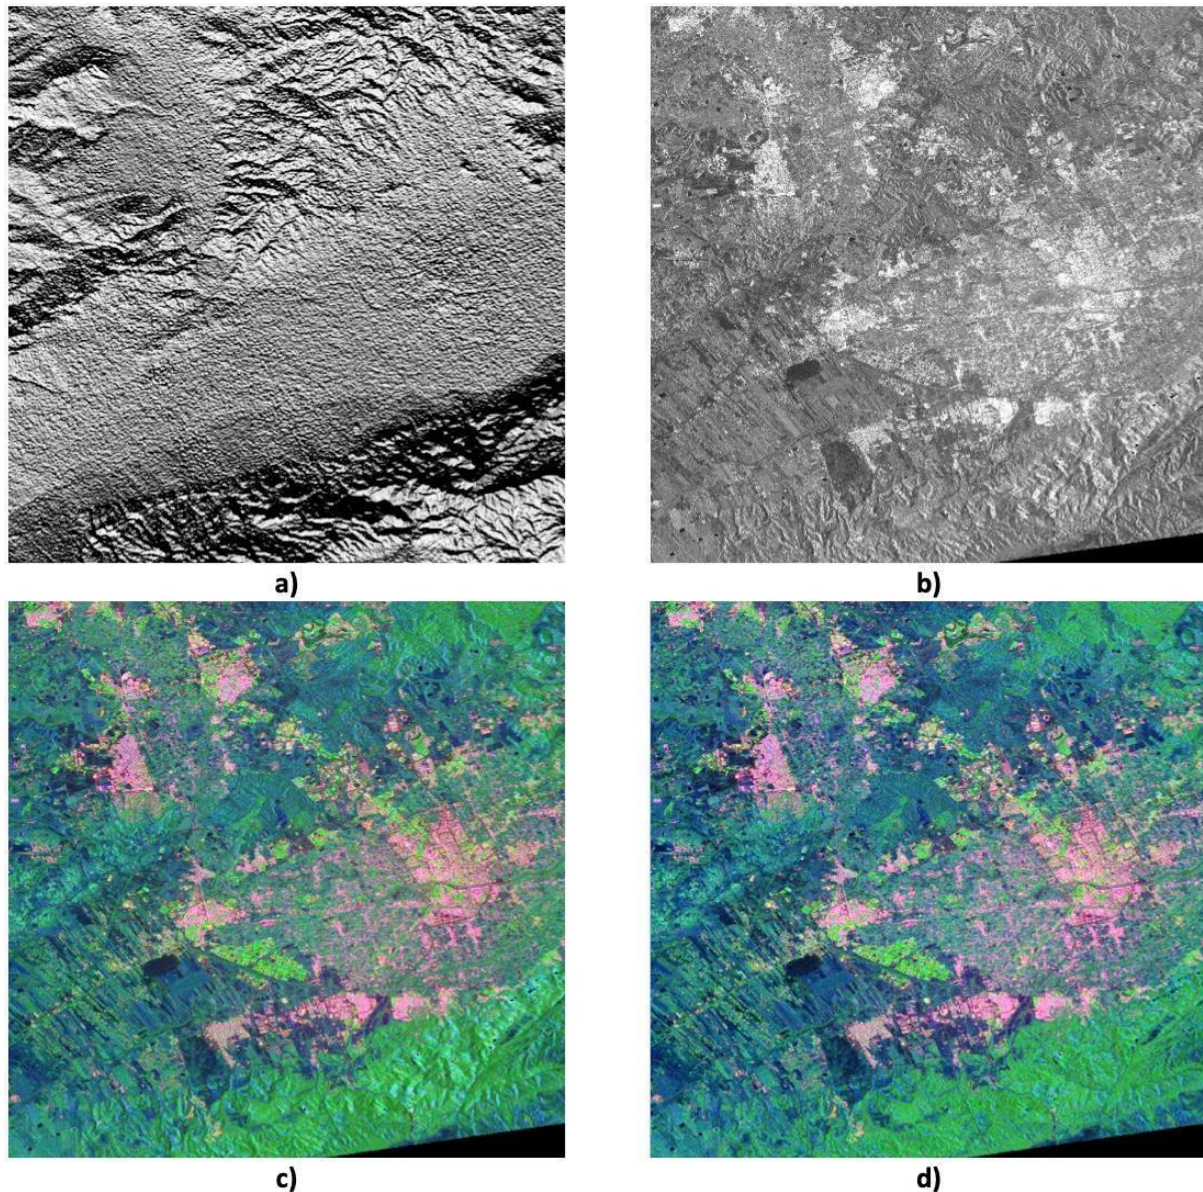


Figure A2.1 Example of polarimetric decomposition generated from ARD covariance format. **a)** Shaded DEM of the area; **b)** RADARSAT-2 HH intensity; **c)** Yamaguchi decomposition colour composite (Red: even bounce, Green: random, Blue: odd bounce); **d)** Same as c) with terrain flattening option. Generated from Radarsat-2 FQ18W acquired over Murcia, Spain on 18 June 2014 ©MDA 2014

Figure A2.2 is a **[PRD]** compact polarimetric m-chi decomposition (Raney *et al.*, 2012) simulated from two Canadian prairies Radarsat-2 fully polarimetric scenes acquired in May and June 2012. In May, before the growing season (Figure A2.2a), m-chi shows mainly surface scattering from bare soil (blue channel) and vegetation interaction from forested areas (green channel), while in June (Figure A2.2b) growth of vegetation modifies the radar signal with interacting media function of the vegetation density and geometry which increase the amount of even bounce (red channel) and random scattering.

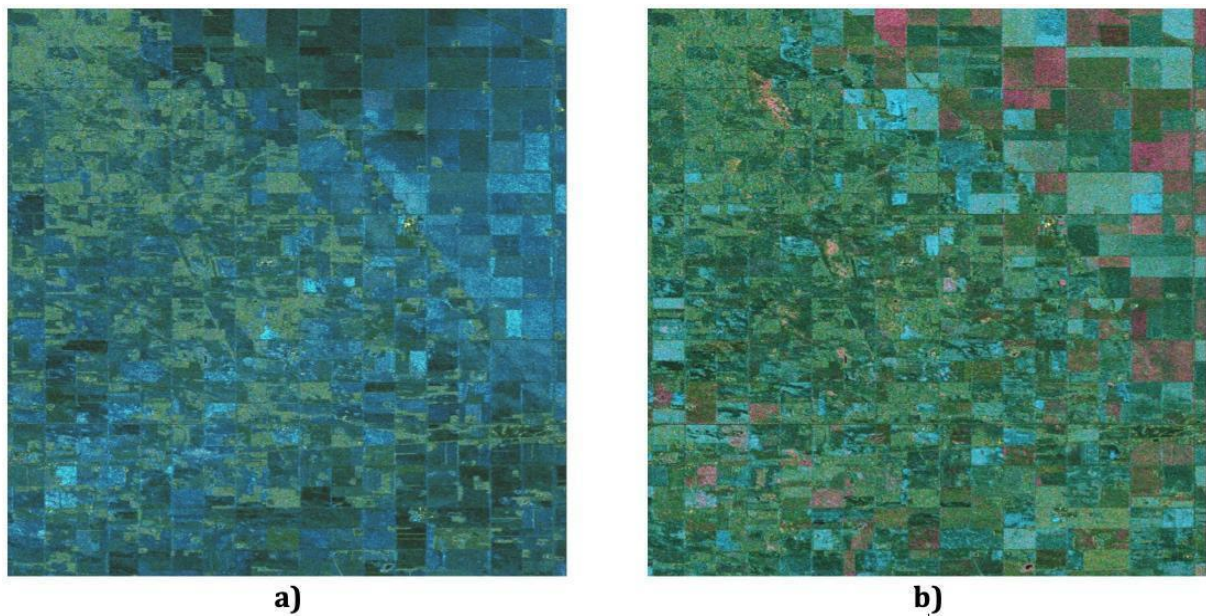


Figure A2.2. m-chi decomposition colour composite of simulated compact polarimetry from Radarsat-2 over an agriculture area. RGB representation: Red: even bounce, Green: random, Blue: odd bounce. **a)** 3 May 2012; and **b)** 18 June 2012. Generated from Radarsat-2 FQ6W acquired over SMAPVEX12 campaign Manitoba, Canada on 3 May and 20 June 2012 ©MDA 2012

Annex 3: Ocean Radar Backscatter [ORB] example

In contrast to [NRB] and [POL], CEOS-ARD Ocean Radar Backscatter [ORB] products are geoid corrected and are provided in the Sigma-Nought (σ_E^0) backscatter convention (Figure A3.1a), which is recommended for most ocean applications. In addition, availability of the “Local (or Ellipsoidal) Incidence Angle Image” (Figure A3.1d) and “Look Direction Image” per-pixel metadata are highly recommended (otherwise the general metadata “1.7.12 Look Direction Polynomials”) since they required for operational applications like ocean wind field estimates.

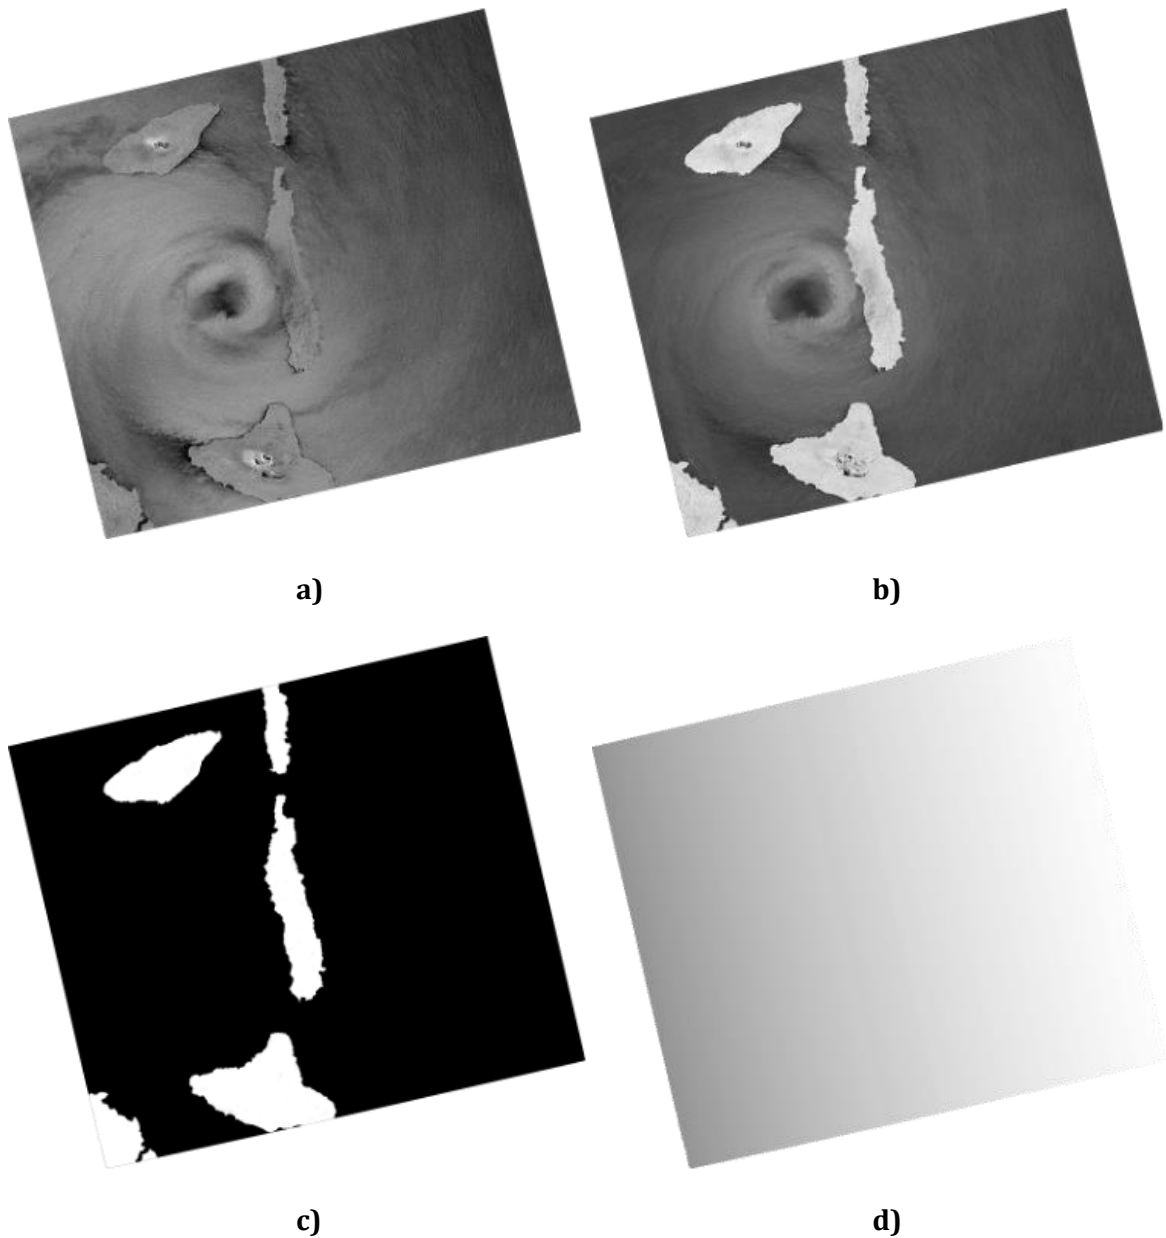


Figure A3.1 Sentinel-1 [ORB] product. Tropical Cyclone Harold passing Vanuatu on April 6, 2020. **a)** VV intensity **b)** VH intensity **c)** Data mask image **d)** Local incident angle. Processing: A. Rosenqvist (soloEO).

Annex 4: Geocoded Single-Look Complex [GSLC] example

In contrast to basic [NRB] and [POL] products, CEOS-ARD Geocoded SLC [GSLC] products are kept close to the native resolution in complex data format for which local topographic InSAR phases, relative to a reference orbit (Zebker *et al.*, 2010; Zebker 2017), have been removed. Having a volume of [GSLC] products acquired over repeat cycles, already radiometric and phase terrain corrected and geocoded (Figure A4.1a) and Figure A4.1b), allows user-friendly production of a first iteration of the InSAR coherence (Eq. A4.1 and Figure A4.1c) and differential phases (Eq. A4.2 and Figure A4.1d) in between [GSLC] pairs, simply by applying local averaging window over the product of a [GSLC] product (GSLC1) with the complex conjugate of a second [GSLC] (GSLC2) divided by their local averaged intensities. These intermediate files could be used for coherent change detection analysis and surface displacement monitoring.


$$\text{Complex coherence:} \quad \rho = \frac{\sum[GSLC_1 * conj(GSLC_2)]}{\sqrt{\sum|GSLC_1|^2 * \sum|GSLC_2|^2}} \quad \text{Eq. A4.1}$$

The InSAR differential phase (Eq. A4.2) is the argument of the complex coherence estimated with Eq. 4.1.


$$\text{InSAR differential phase:} \quad \varphi = \arg(\rho) \quad \text{Eq. A4.2}$$

Some advanced [NRB] or [POL] products could include per-pixel “Flattened Phase” data (item 3.7). This “Flattened Phase” enables the possibility to perform InSAR analysis as with two [GSLC] products. As for example, from two different [NRB] products (NRB1) and (NRB2), acquired over repeat cycles (i.e., on the same relative orbit), containing γ_T^0 and their corresponding “Flattened Phase” (FPh1) and (FPh2) per-pixel data, the complex InSAR coherence (Eq. A4.3) can be estimated in the similar manner as Eq. A4.1 for [GSLC] products.

$$\text{Complex coherence:} \quad \rho_{NRB} = \frac{\sum[(\sqrt{NRB_1} \cdot e^{i \cdot FPh1}) \cdot conj(\sqrt{NRB_2} \cdot e^{i \cdot FPh2})]}{\sqrt{\sum NRB_1 * \sum NRB_2}} \quad \text{Eq. A4.3}$$

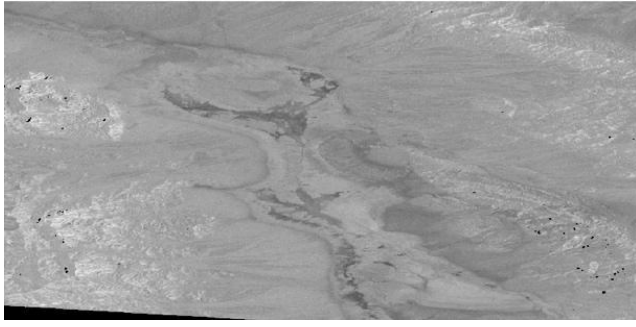


a)

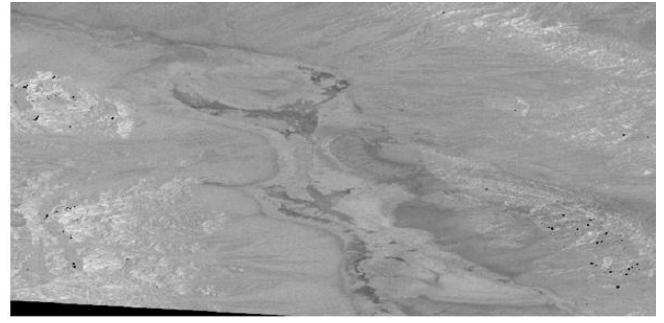

b)



c)

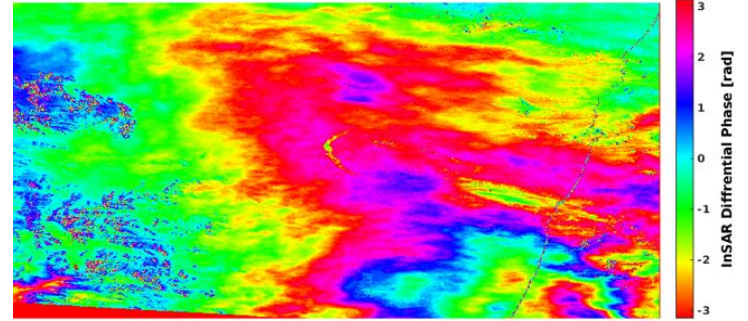

d)

Figure A4.1 Sentinel-1 [GSLC] products example over Death Valley National Park, California, US. **a)** GSLC1: Intensity data of the first [GSLC] product (2017-05-27); **b)** GSLC2: Intensity data of the second [GSLC] product (2017-06-08); **c)** InSAR coherence map generated directly from A4.1a) and b); **d)** InSAR differential phase map generated directly from A4.1a) and b).

Some advanced [GSLC] product can be provided with “2.12 Radar Unit Look Vector Grid Image” per-pixel metadata (Figure A4.2) which gives the accurate 3-D components radar unit look vector used as for example in decomposing the vertical and horizontal component of an InSAR surface displacement estimate.

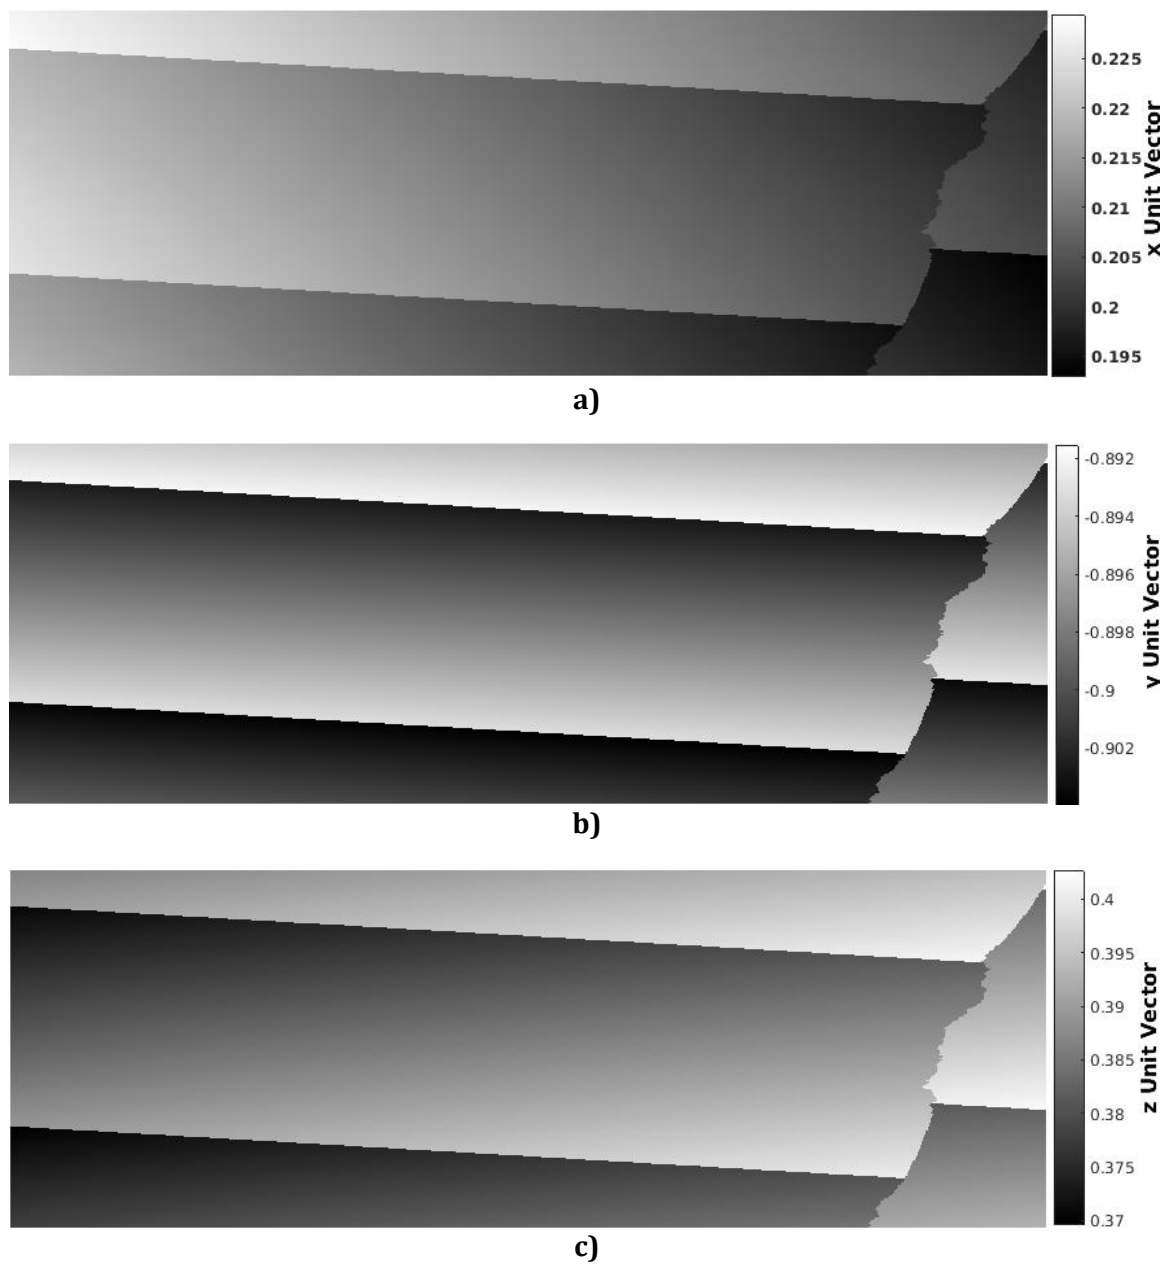


Figure A4.2 3-D components radar unit look vector of the [GSLC] product in Figure A4.1. **a)** x unit component; **b)** y unit component; **c)** z unit component.