

Early Flood Warning Pilot Project in Namibia

Dan Mandl – NASA/GSFC

April 24, 2012

Presentation for WGISS-33 in Tokyo Japan





Where is Namibia





Namibia Use Case: 2009 Flood Disaster

- *In February and March 2009, torrential rains increased water levels in Zambezi, Okavango, Cunene and Chobe Rivers*
- *This led to a 40-year flood in Caprivi, Kavango and Cuvelai basins, affecting some 750,000 people (37.5% of population of Namibia)*
- *Whole villages were cut off and had to be relocated into camps. Some 50,000 people were displaced*
- *Livestock were stranded and died of hunger*
- *102 people died*





Flood Related Impacts

- Health
 - Malaria
 - Cholera
 - Schistosomiasis
- Infrastructure damage
 - Roads
 - Schools
 - Clinics
- Food security
 - Crop and wildlife loss
- Human wildlife conflict
 - Encroachment of wildlife on human settlements



Stakeholders

- Namibia Department of Hydrology
- University of Namibia
 - Department of Geography
 - Multidisciplinary Research Center
- Namibia Ministry of Health
- NASA/GSFC
- University of Maryland, Department of Geography
- University of Oklahoma
- University of Chicago
- Open Cloud Consortium
- Committee on Earth Observing Satellites (CEOS)
 - Disaster Societal Benefit Area
 - Working Group on Information Systems and Services (WGISS)



Project Objectives

- Define & facilitate implementation of a sensor web-based architecture for risk management from a multi-hazard perspective
- Address scope of GEOSS Task (Disaster Management DI-09-02b-3)
- Expected Impact:
 - Reduce the time to acquire and improve the use of relevant satellite data for flood assessment and forecasting
 - Increase the usefulness of derived satellite flood data products for local populations
- Approach:
 - Coordinate with WGISS to document and prototype a disaster management architecture to demonstrate improved decision support capability and access to remote sensing assets
 - Conduct socioeconomic surveys in flood prone areas
 - Identify local concerns/cultural barriers which prevent use of local flood forecasts
 - Explore methods to incorporate local observations into decision support systems and social networking technology (e.g crowd sourcing)

Objectives Illustrated



Satellite Observation



In-Situ Gauge

$$E = 1 - \frac{\sum_{t=1}^T (Q_o^t - Q_m^t)^2}{\sum_{t=1}^T (Q_o^t - \bar{Q}_o)^2}$$

Predictive Flood Model



Household Surveys



SensorWeb Processing



Decision Support System




Economic Impacts



Namibia Flood Dashboard




Local Notification

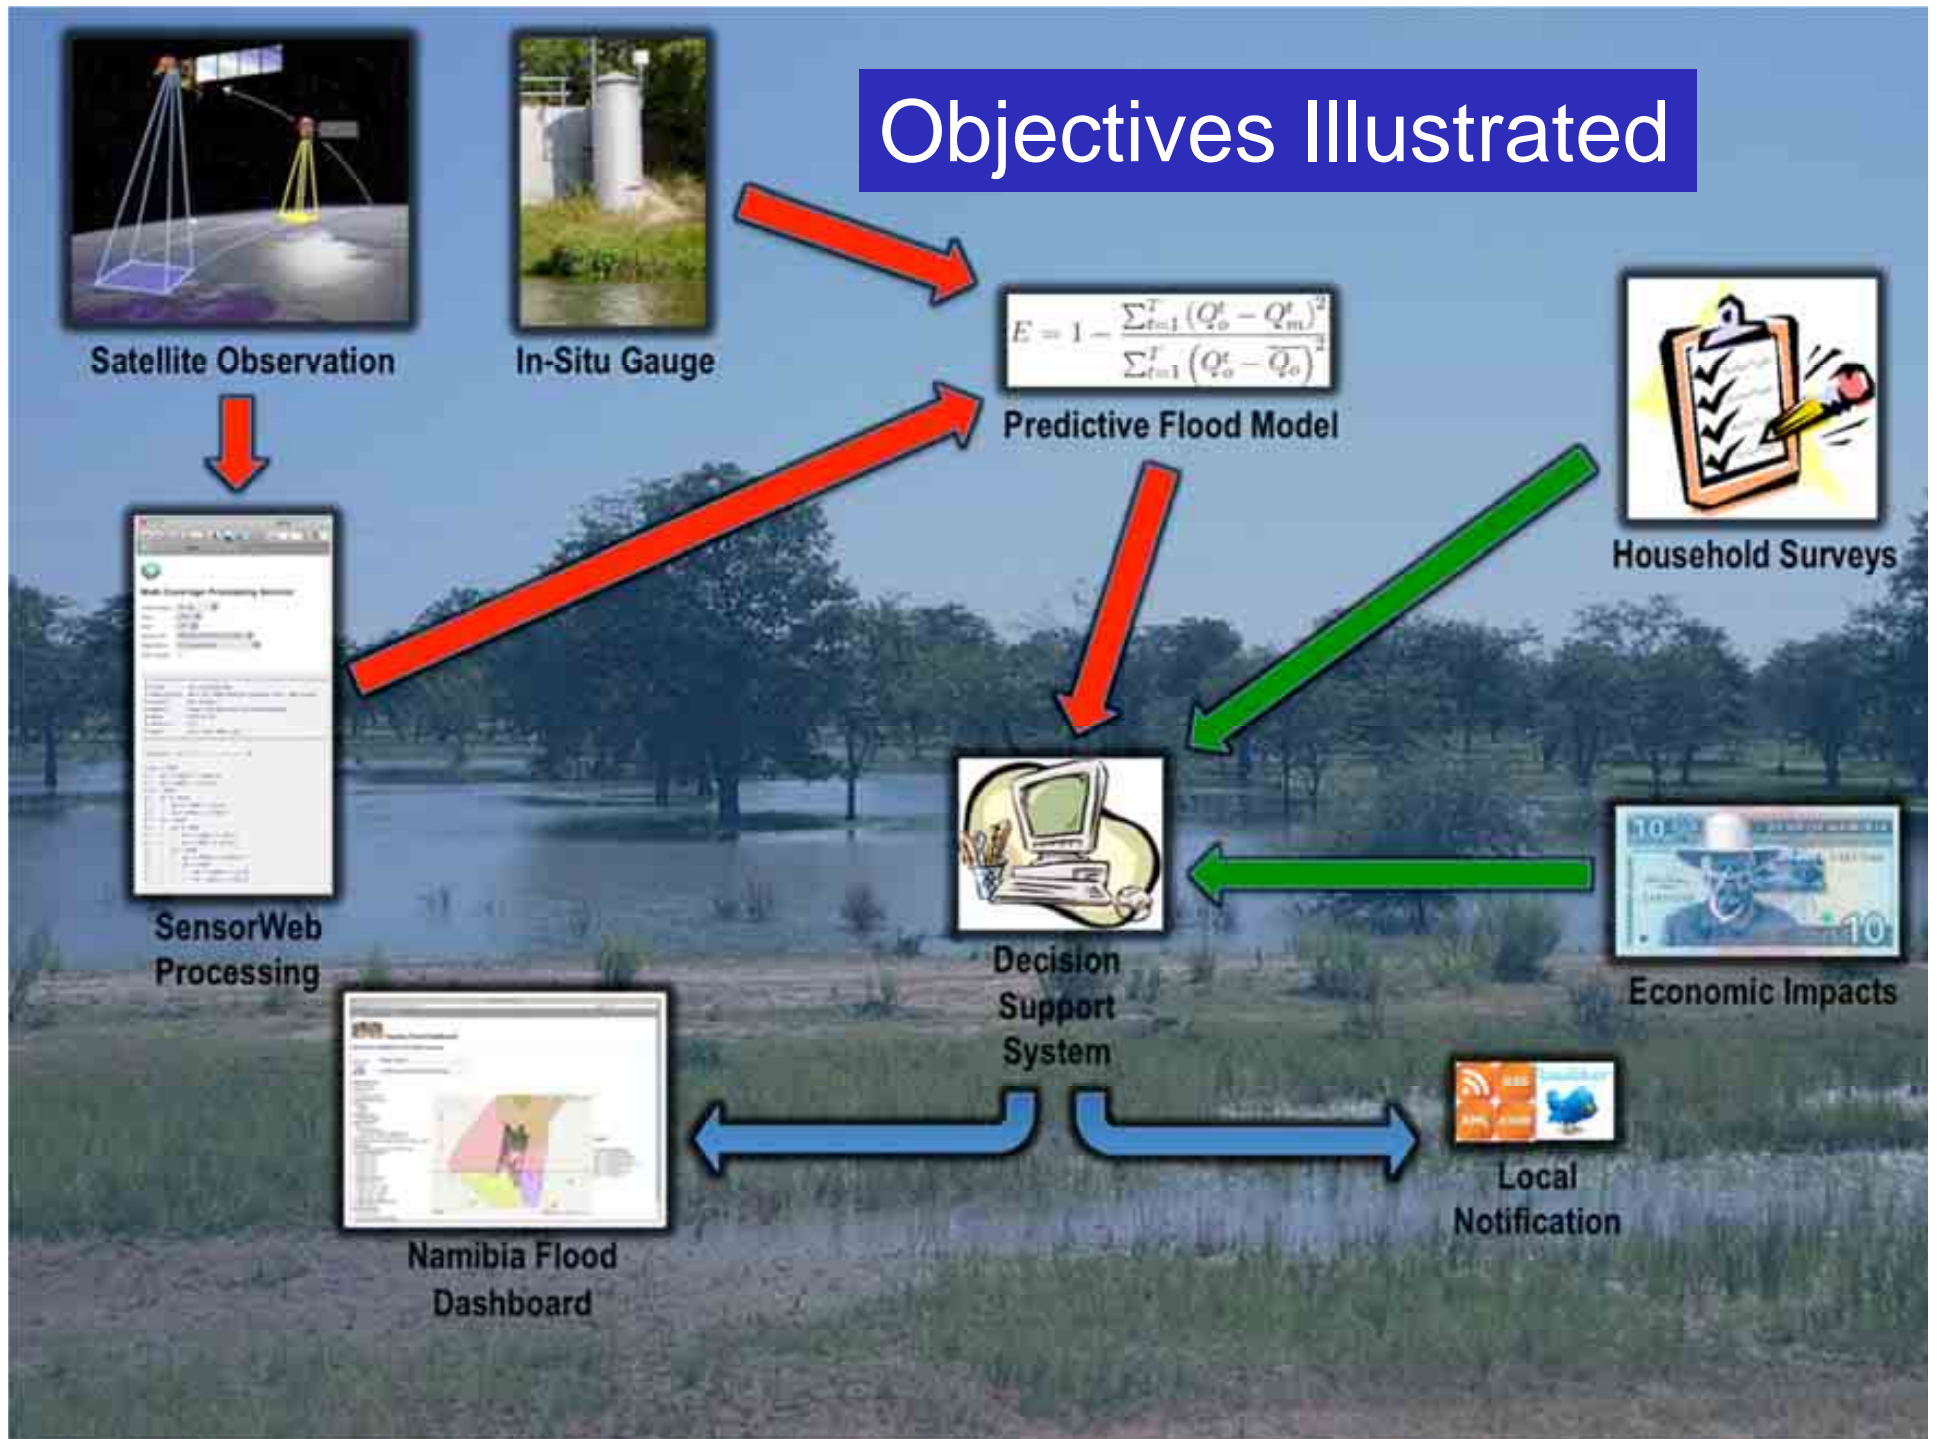



NASA Flood SensorWeb Concept

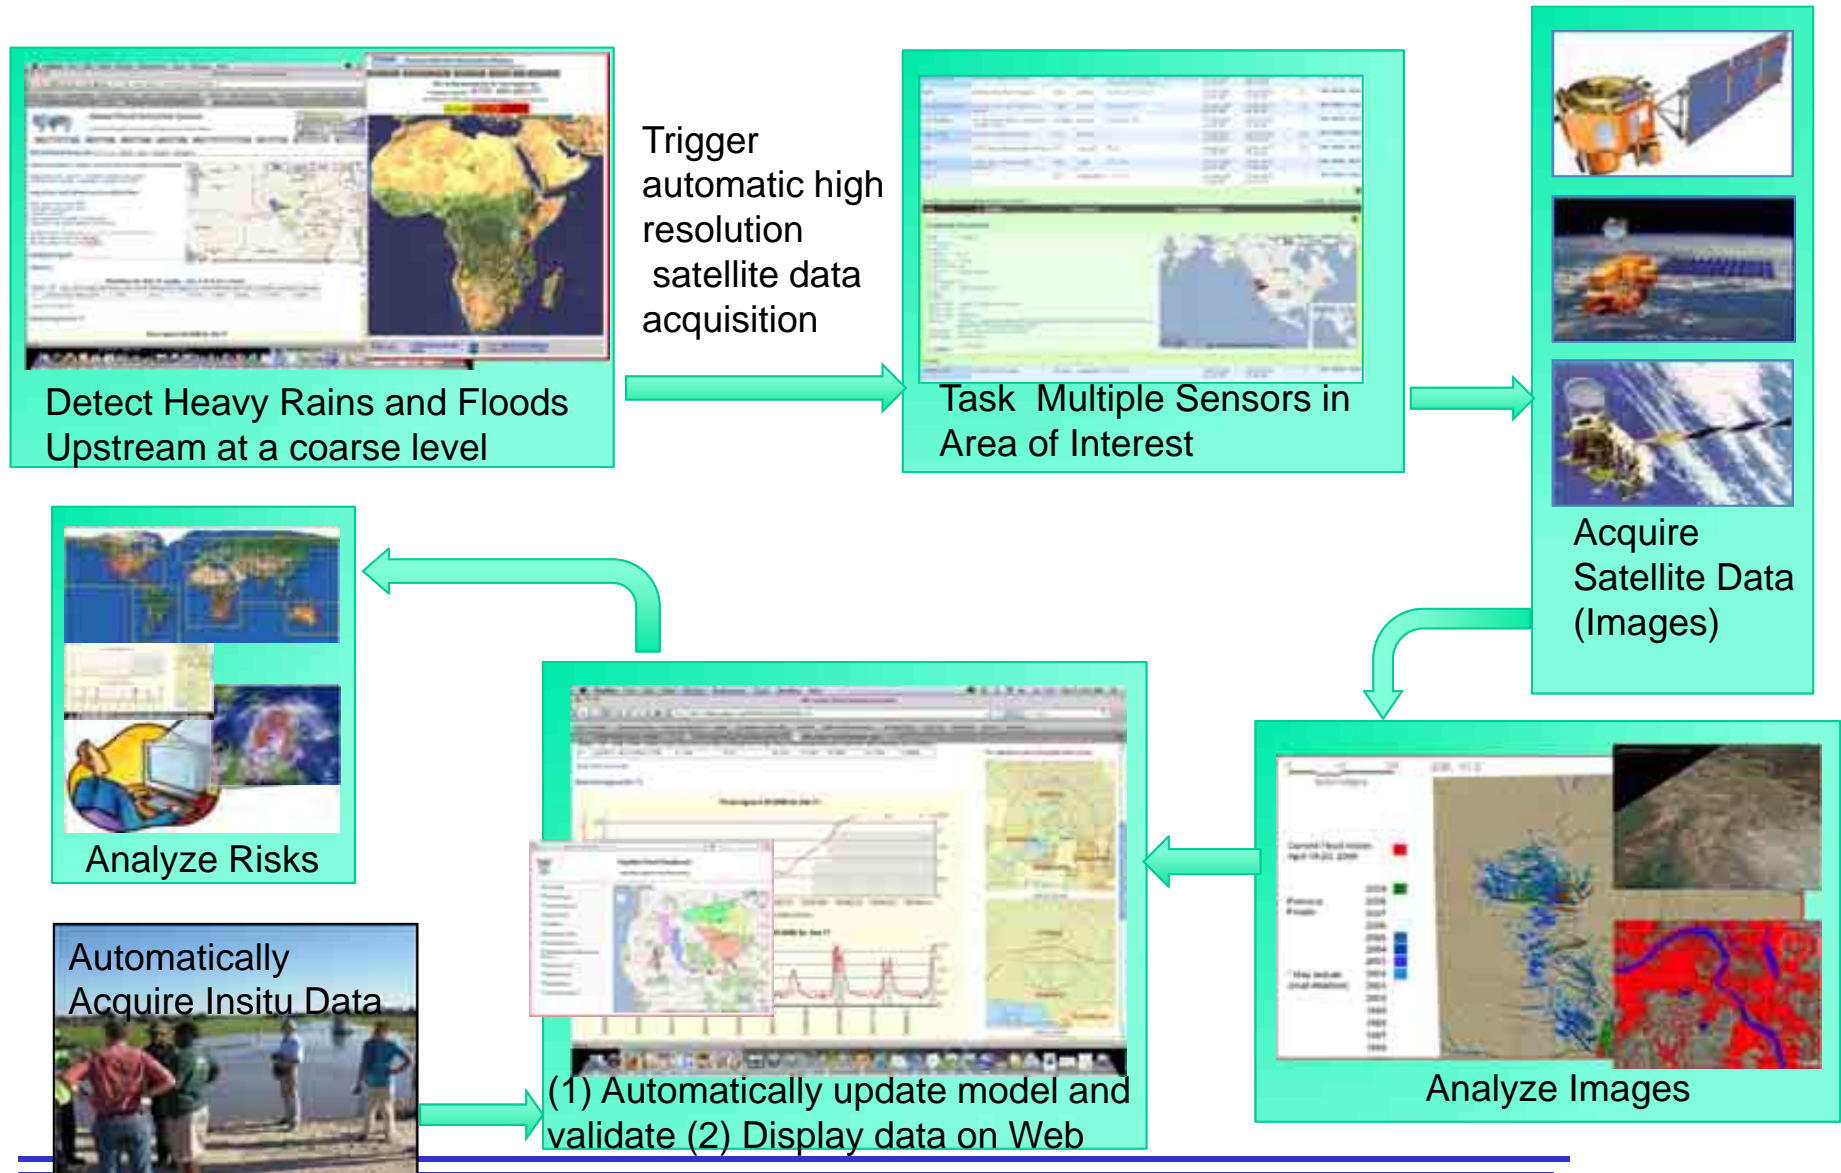




Approach

- Namibia Department of Hydrology, Namibia Ministry of Health
 - In-country equipment, personnel and other resources
 - Logistics support
 - Direct technology development of other stakeholders
 - Local conditions expertise
- NASA, Univ. of Maryland, Univ. of Chicago, Univ. of Oklahoma, Open Cloud Consortium
 - Satellite imagery
 - Training on how to process the imagery to extract salient flood information
 - Preliminary flood models
 - Training on further refinement of flood models
 - Computation cloud and web interface to host data, models and displays
- Univ. of Namibia and Univ. of Maryland
 - In country survey development and design
 - Conduct case study surveys in flood prone areas
 - Culturally informed data analysis




SensorWeb High Level Architecture

Sensors, Algorithms and Models Wrapped in Web Services Provide Easy Access to Sensor Data and Sensor Data Products

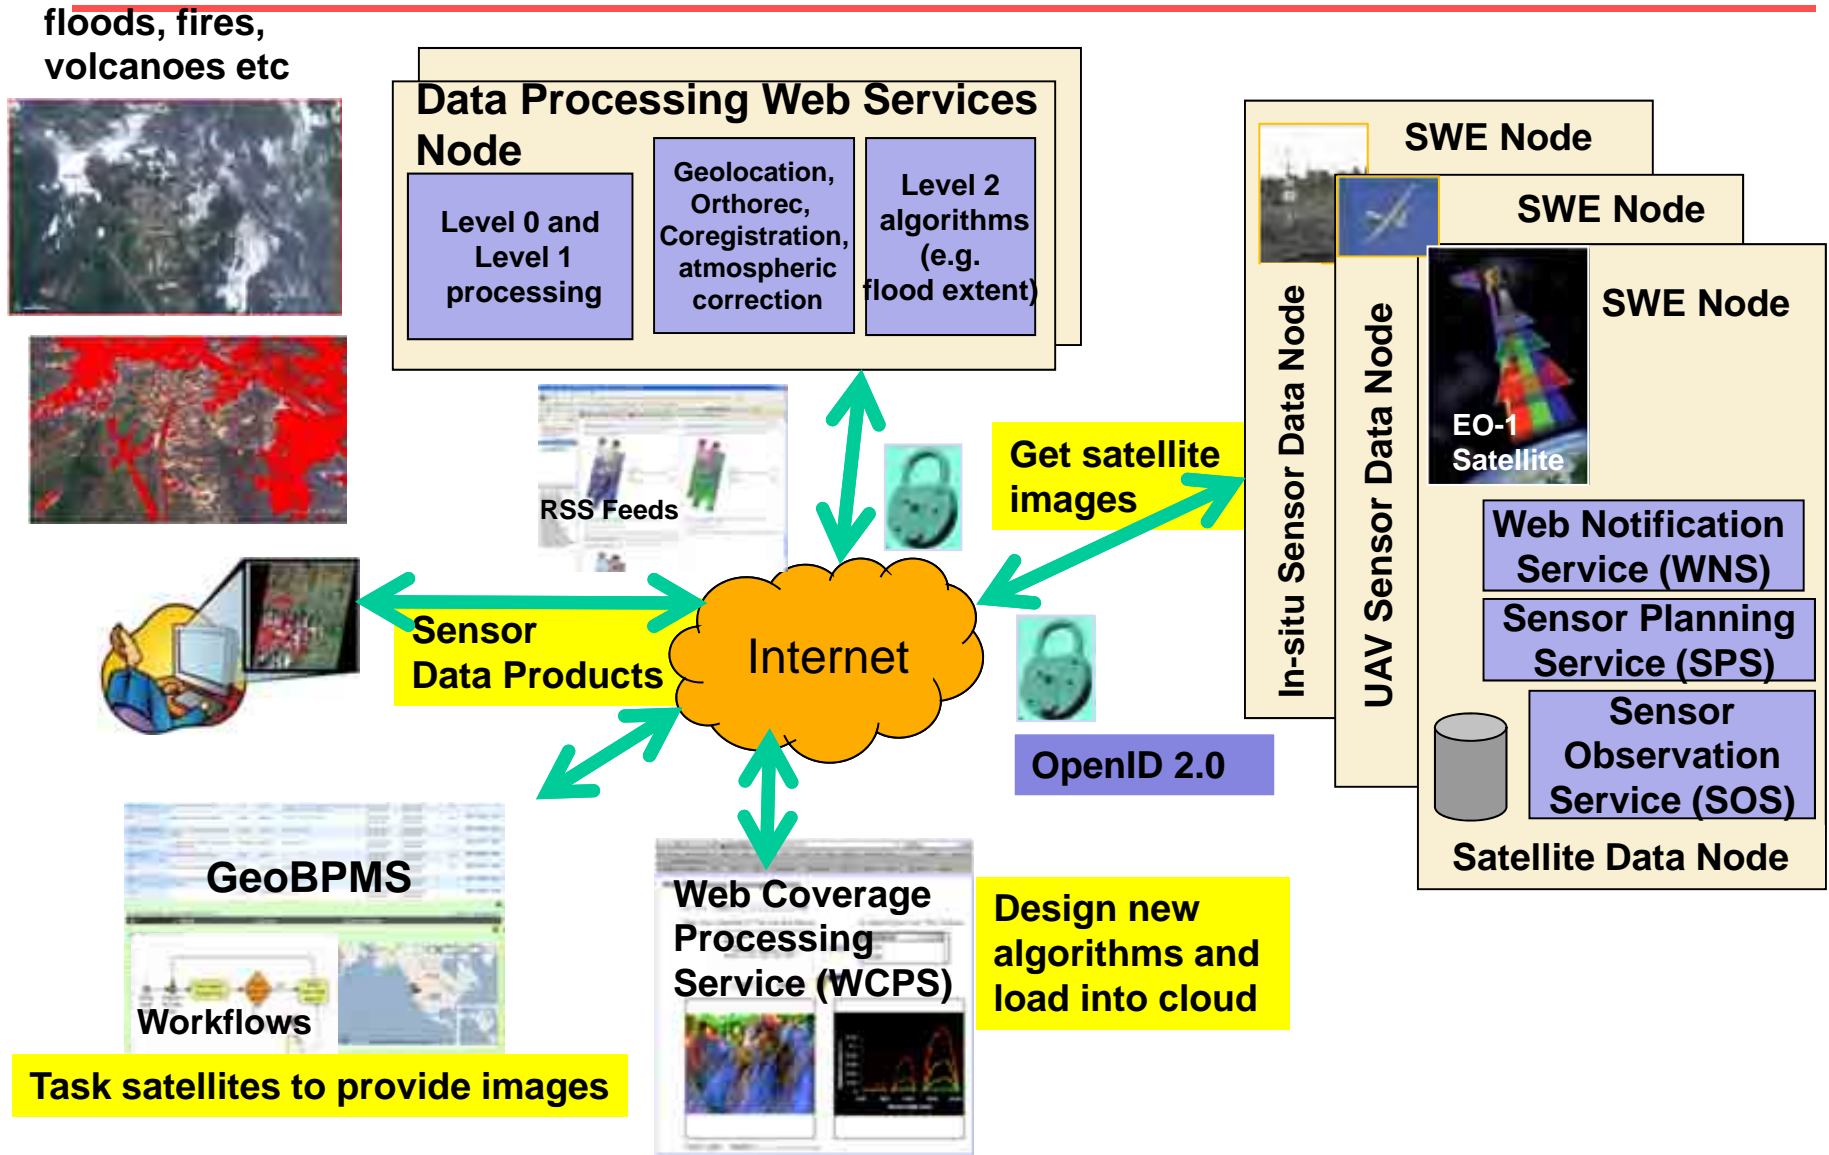




Cloud Configuration for Flood Dashboard

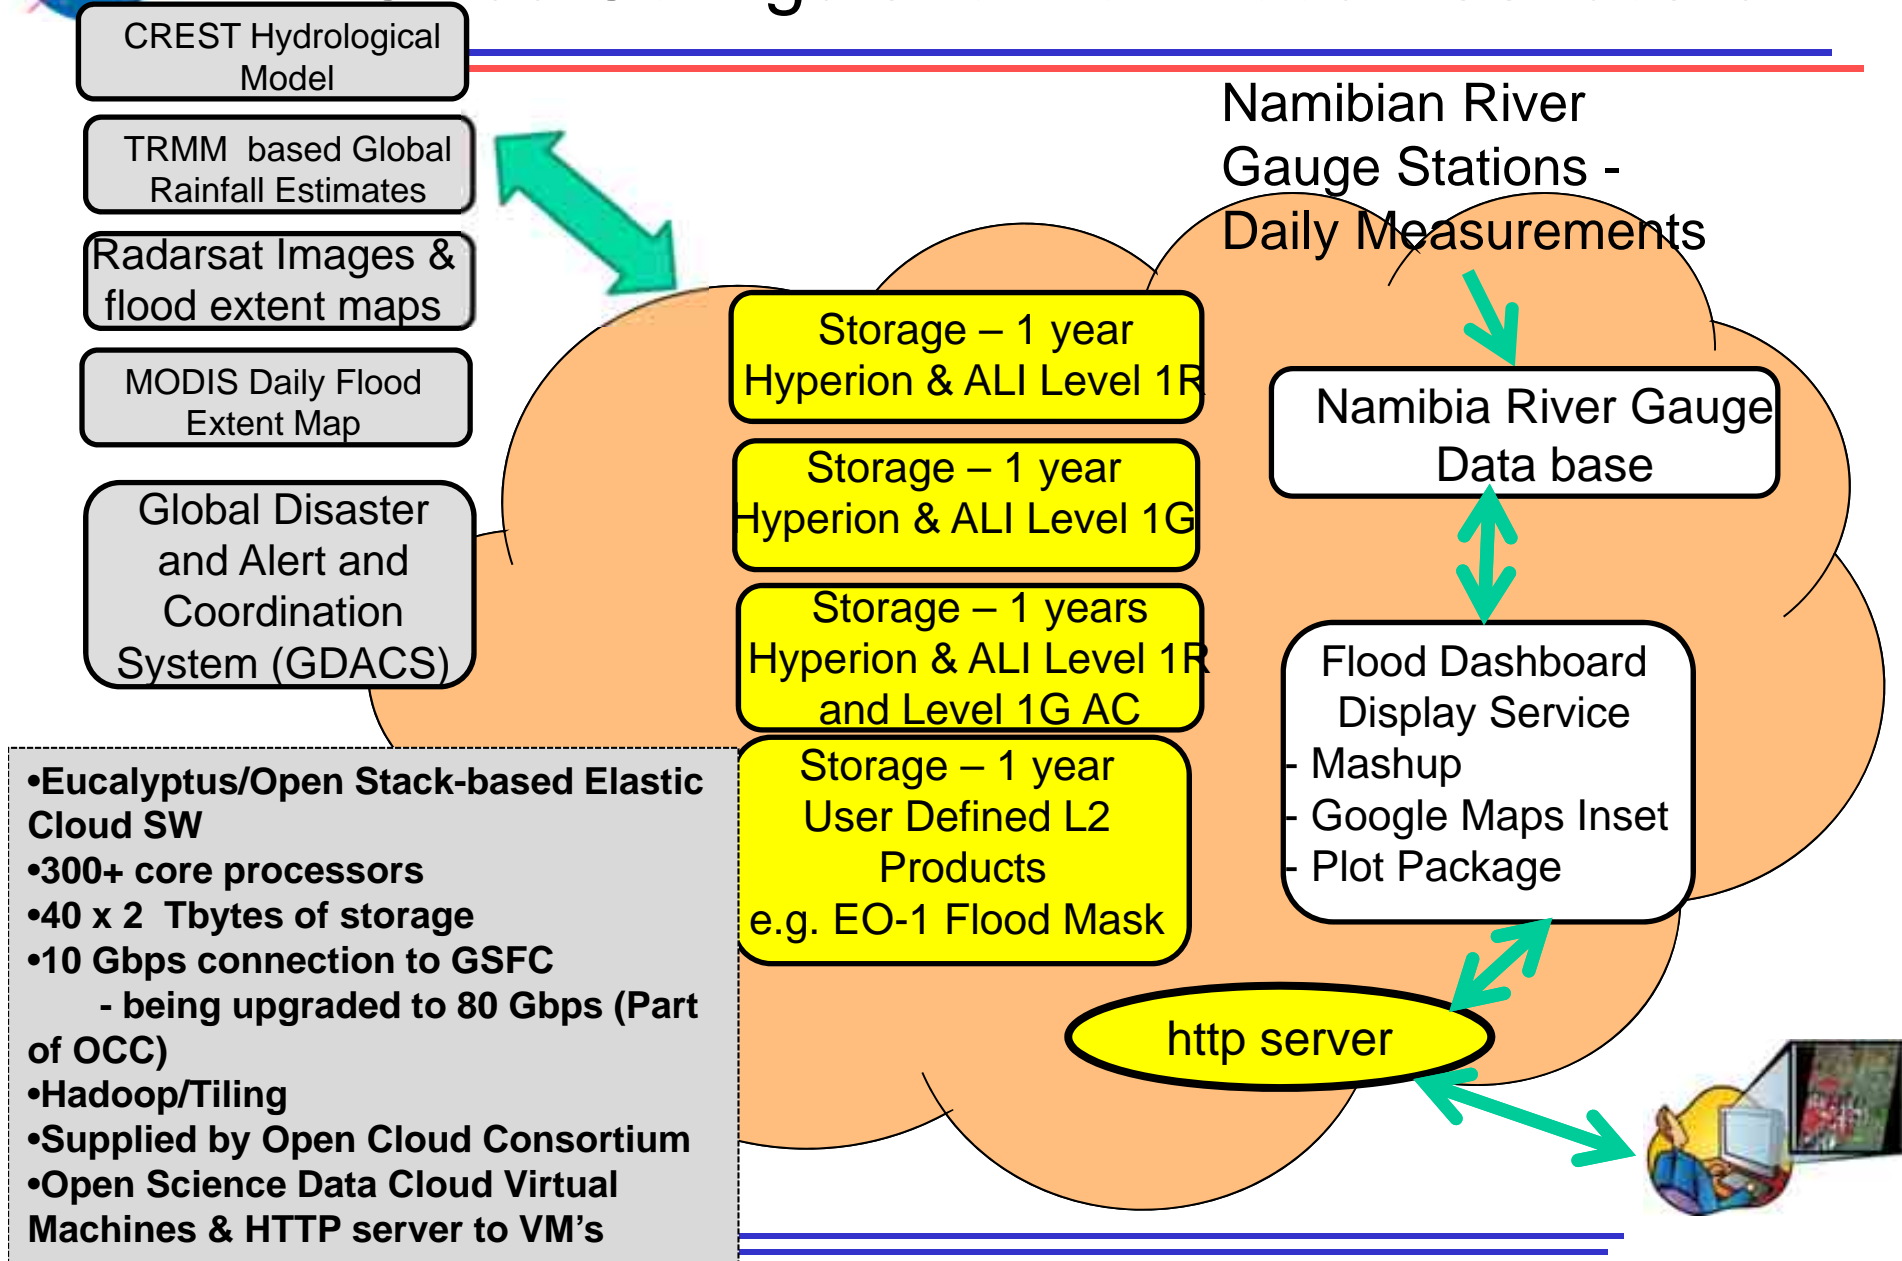



Hadoop and Tiling Handles Large Dataset Displays

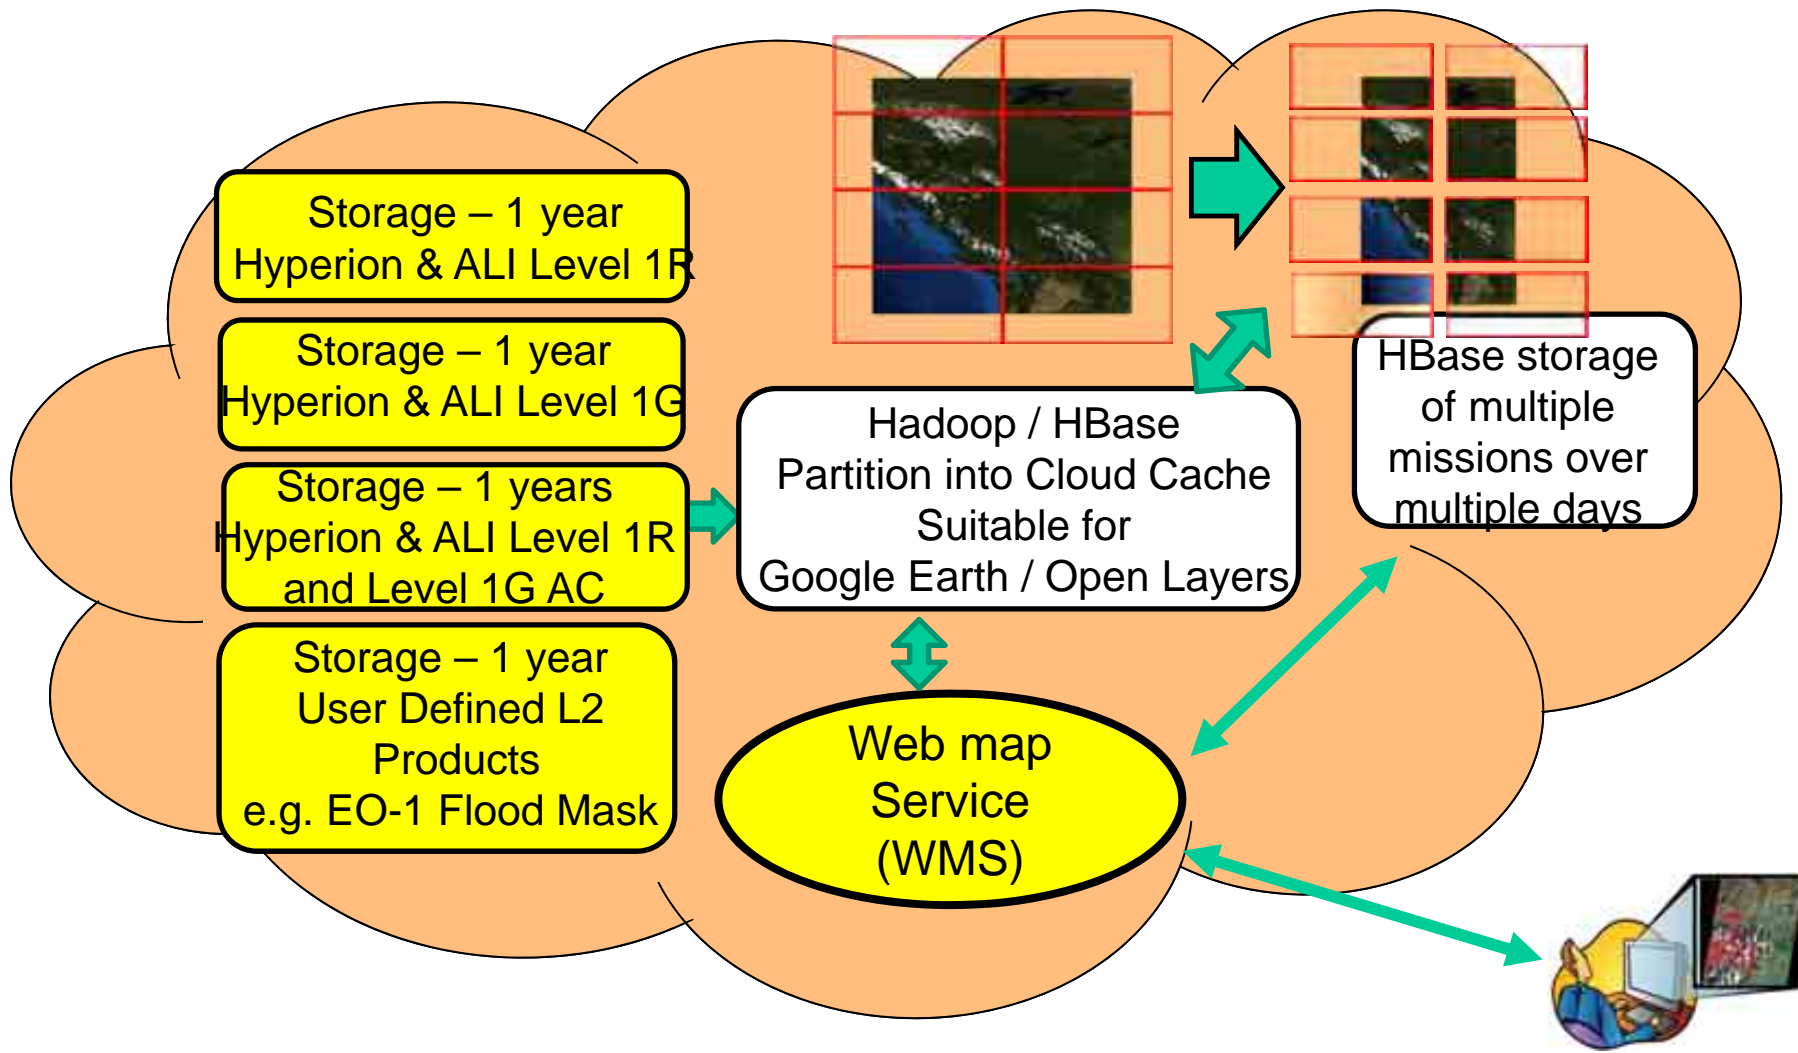



Potential Case Study, Cuvelai Basin - Oshana Formations

- Seasonally inundated depressions.
- Undulating landscape with topographic relief of approximately 1 meter at 1 km ASL.
- Characteristic landscape for a large area of northern Namibia and southern Angola, ca. 150 km northwest of the Etosha Pan.
- Characterized by small scale agriculture and grazing, with seasonal harvest of fish which breed in the oshanas.
- Over 50% of country's population lives in this area
- This area experiences the most flood damage in the country



Oshakati in Northern Namibia
flood picture in 2009

Google Earth View of High Population and High Flood Risk Area in Northern Namibia



Shanalumono River Gauge Station




Oshakati



Ongwediva

Water flow from North through basin

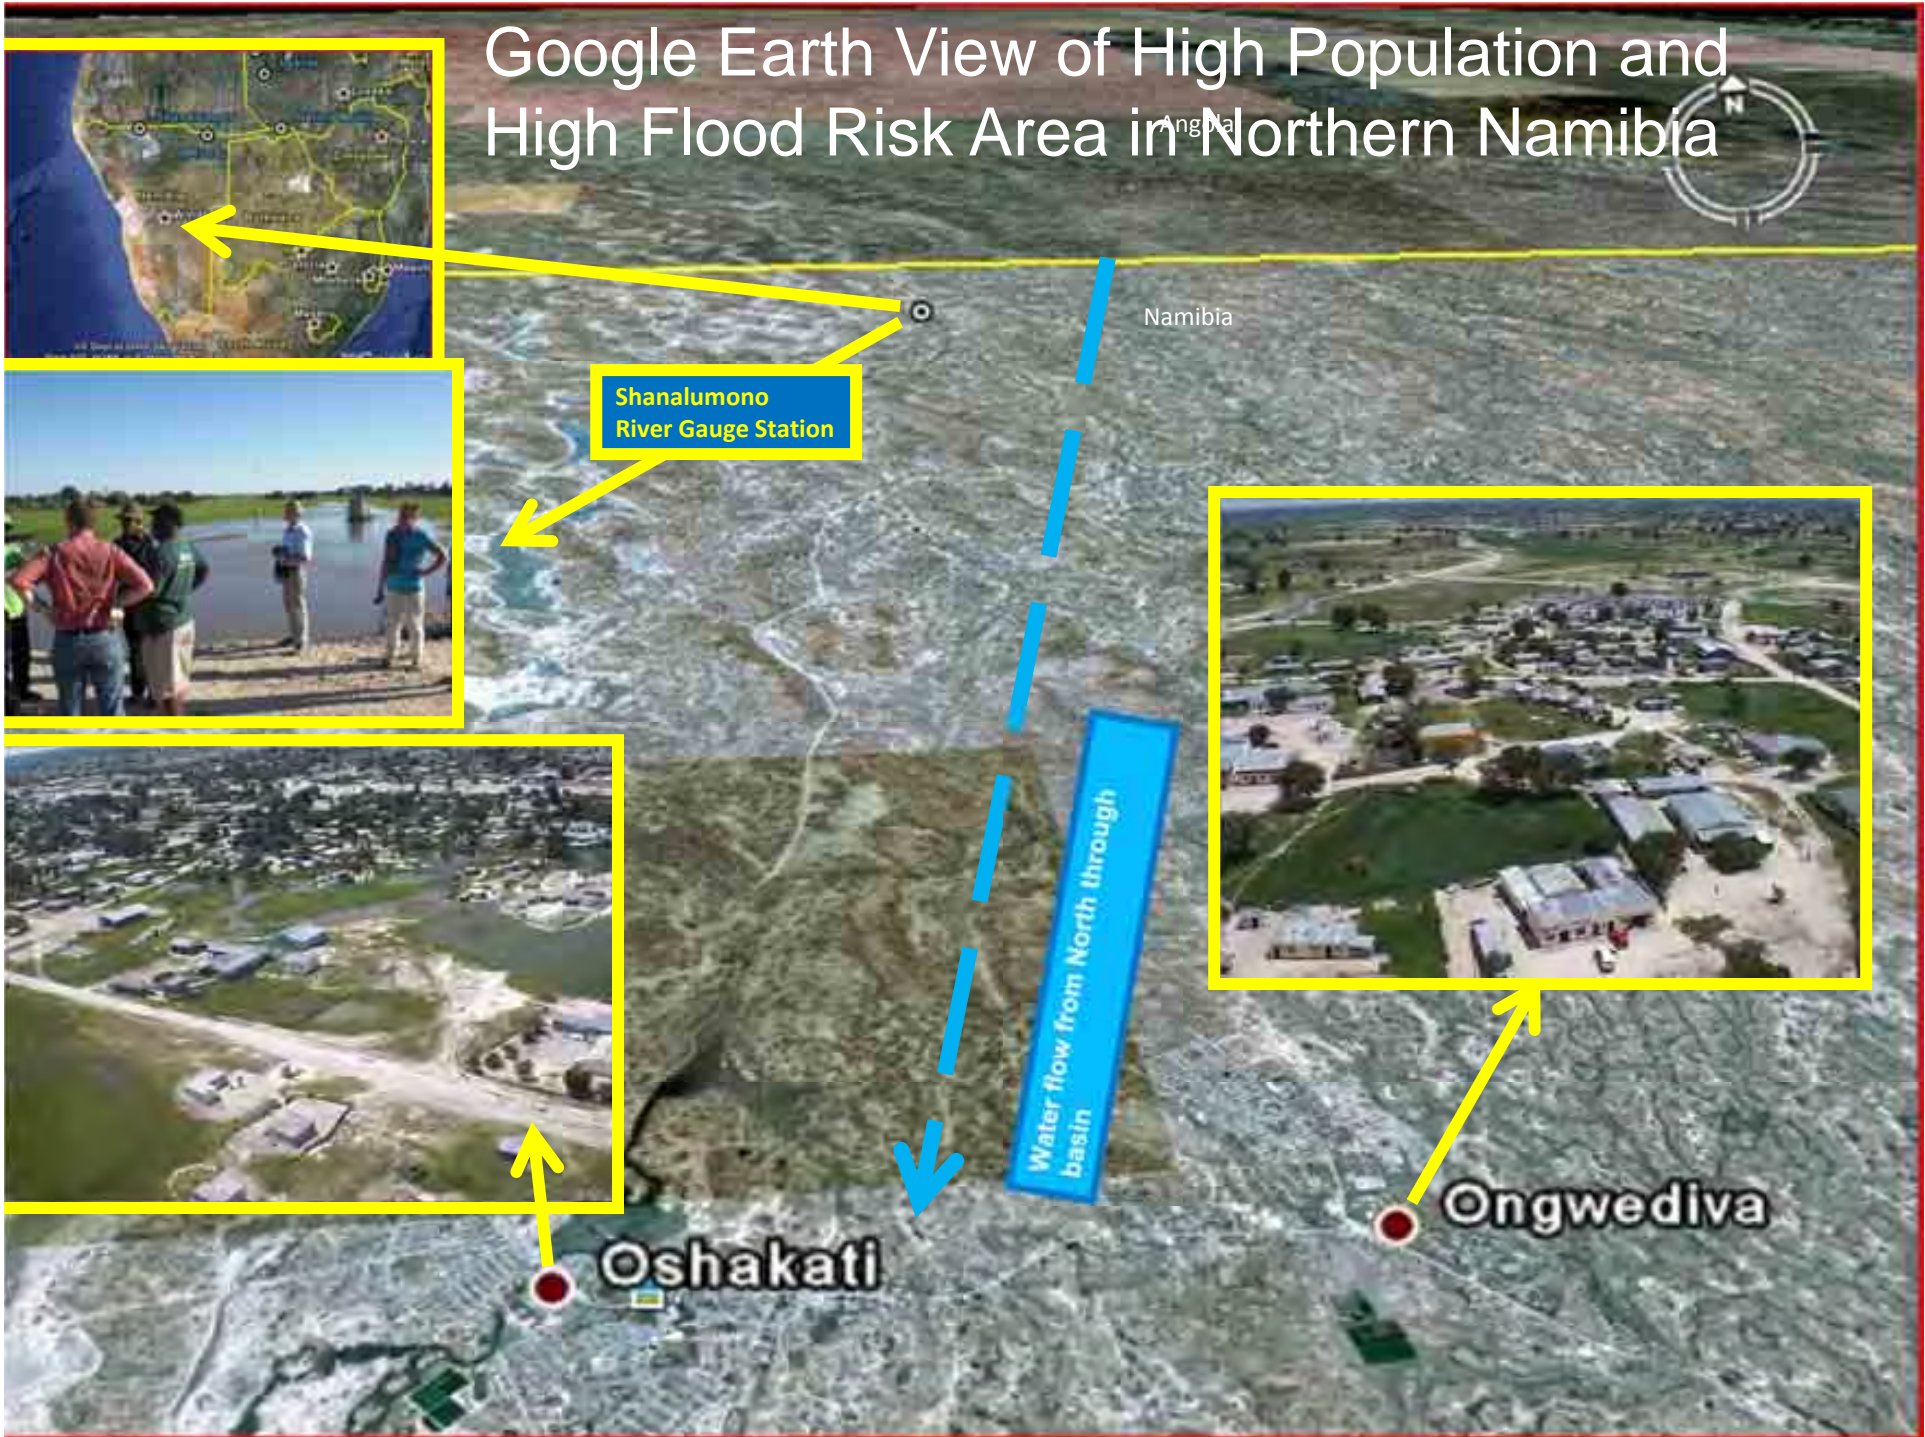




EO-1 Satellite Image of High Risk Flood Area in Northern Namibia



Shanalumono river
gauge station taken
From helicopter
Dan Mandl,
Jan 29, 2011



Earth Observing 1 (EO-1)Advanced Land Image (ALI)
Pan sharpened to 10 meter resolution, Oshakati area Oct 10, 2010
Processing by WCPS, Pat Cappelaere and Antonio Scari Techgraf/PUC Rio

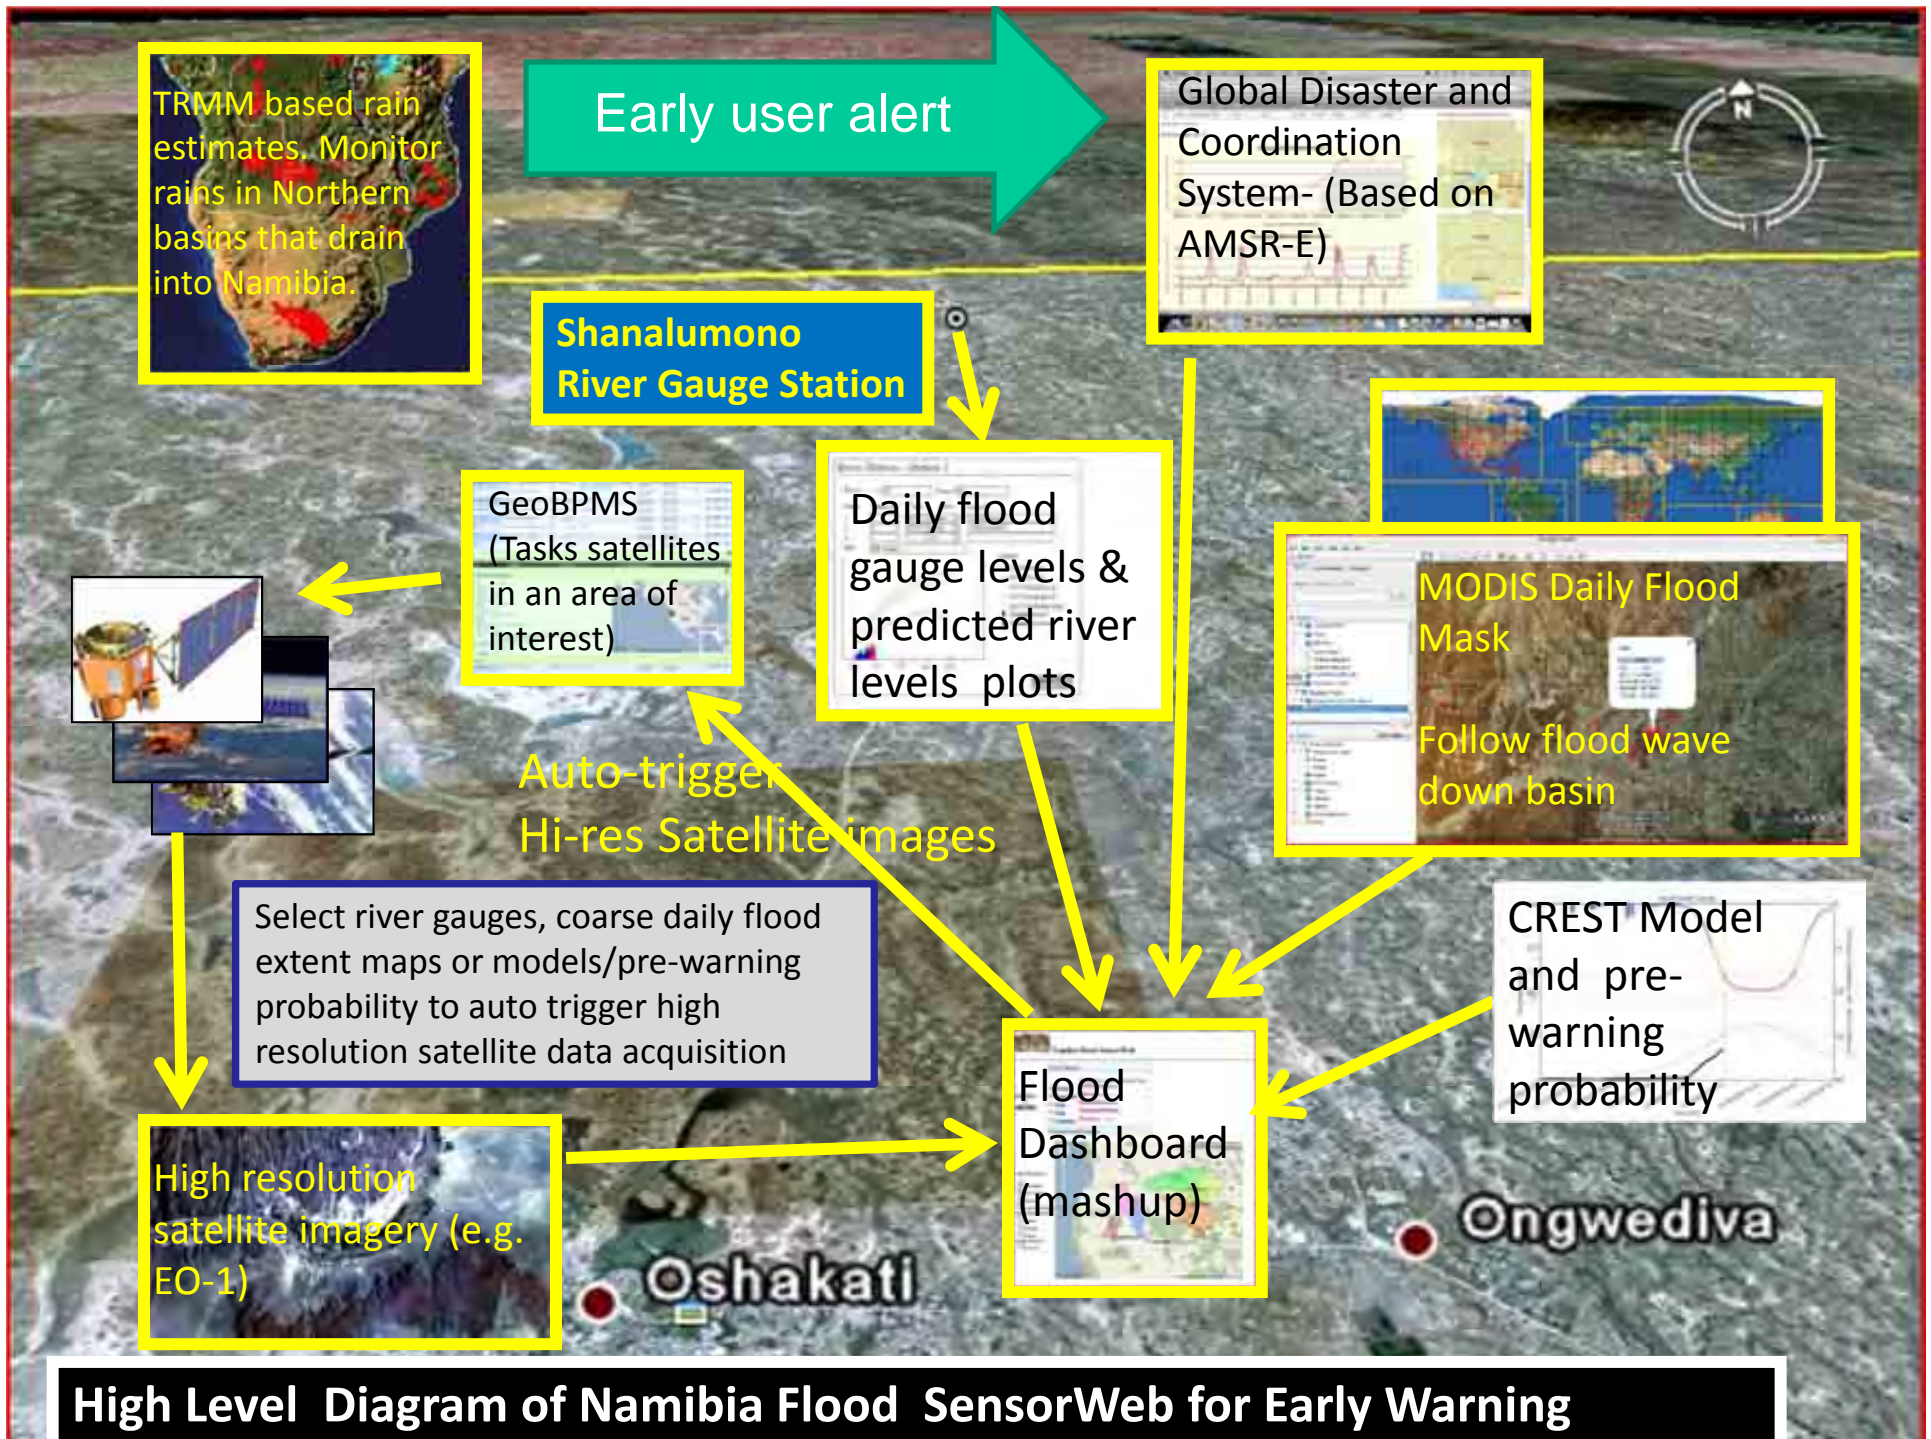



Training for Data Capture



Georeferenced photos to enable Rob Sohlberg from Univ. of Maryland to train classifier to detect presence of water in grassy marsh lands via from satellite data.

McCloud Katjizeu (orange) Dept of Hydrology compares GPS readings of control point with UNAM students for mapping exercise



Project Augmentation: Socioeconomic Assessment



Left to Right: Matt Handy (NASA), Reinhold Kambuli (NDH), Village Resident, Dr. Julie Silva(UMD), John Moyo(Local Guide)

Preliminary visits to flood prone villages to gauge community interest in participating in socioeconomic surveys and assess familiarity and perceptions of radio flood forecasts.



Flooding and Impacts on Local Livelihoods



Villager shows flood damage and impact during team site assessment





Flood Impact on Wild Life and Subsequently on Humans Nearby



Hippo tracks near villager
Crop fields. Hippo crop
destruction is big impact to villagers.



Request from Namibia Hydrological Services

- Monitor flooding in near-real time
- Create classification products
 - partition floodwaters by turbidity
 - presence of grasses, etc.
- Demonstrate rapid prototyping utilizing Web Coverage Process Services (WCPS)
 - To be used to both inform civil managers and – more importantly – to developed and validate predictive models.
- Improved hydrological model based on CREST
 - Model developed by University of Oklahoma
- Improved data products pipeline (more automation)



Contributions of Namibian Partners

- Local terrain expertise to improve modeling
- Knowledge of local populations
- Expertise on conducting local surveys
- Develop new techniques and products useful to decision makers
- Namibian model will be extended to other countries and applications.



Hydrology team begins river validation exercise



Dan Mandl/NASA, Alphons Mosimane/UNAM, Selma Lendevlo//UNAM, Dr. Julie Silva/UMD, Dan Mandl/NASA, Victoria Shifidi/Dept Hydrology , Dr. Simon Angombe/UNAM, Margaret Angula/UNAM

Socioeconomic team discusses desired outcomes, timeline and next steps to develop a village level study which is integrated with Hydrology Dept. effort.



Planned Technical Enhancements to Flood Dashboard

- Partnership with Canadian Space Agency to simultaneously task EO-1 and Radarsat and deliver products from both automatically to Flood Dashboard
- Color code river stations to indicate underlying states and click for details
- More options on hydrographs
 - Min
 - Max
 - Average
 - Rainfall plots overlay
- Daily excel file download from FTP site and which provides underlying status and color codes of river gauges
- Track visitors to site
- Prototype pre-early flood warning which shows probability of flooding for next two weeks (via a plot) and is updated daily by model (see next slide)
 - Developed by University of Oklahoma (Yang Hong and Zac Flamig)




Planned Technical Enhancements to Flood Dashboard

- Obtained data from Central Bureau of statistics on this trip. Put on dashboard
 - New dwelling unit data base with schools, roads, commercial buildings, hospitals etc. geolocated and identified by class
 - Begin to evaluate how to use flood data with this data base (e.g. roads blocked due to floods)
- Collected hundreds of GPS encoded photos to enhance /calibrate flood classification algorithm for EO-1
- Radarsat tasking Application Processing Interface (API) integrated with GeoBPMS (due in summer or fall 2012)
- Radarsat processing, and data distribution API
 - Display Radarsat data on IPAD
- Prototype Waterpedia for Architecture Implementation Pilot 2 (AIP-5)
 - High resolution water mask on map
 - Open street format
 - Crowd sourcing to validate and calibrate



Sample Radarsat Data Processed in Cloud

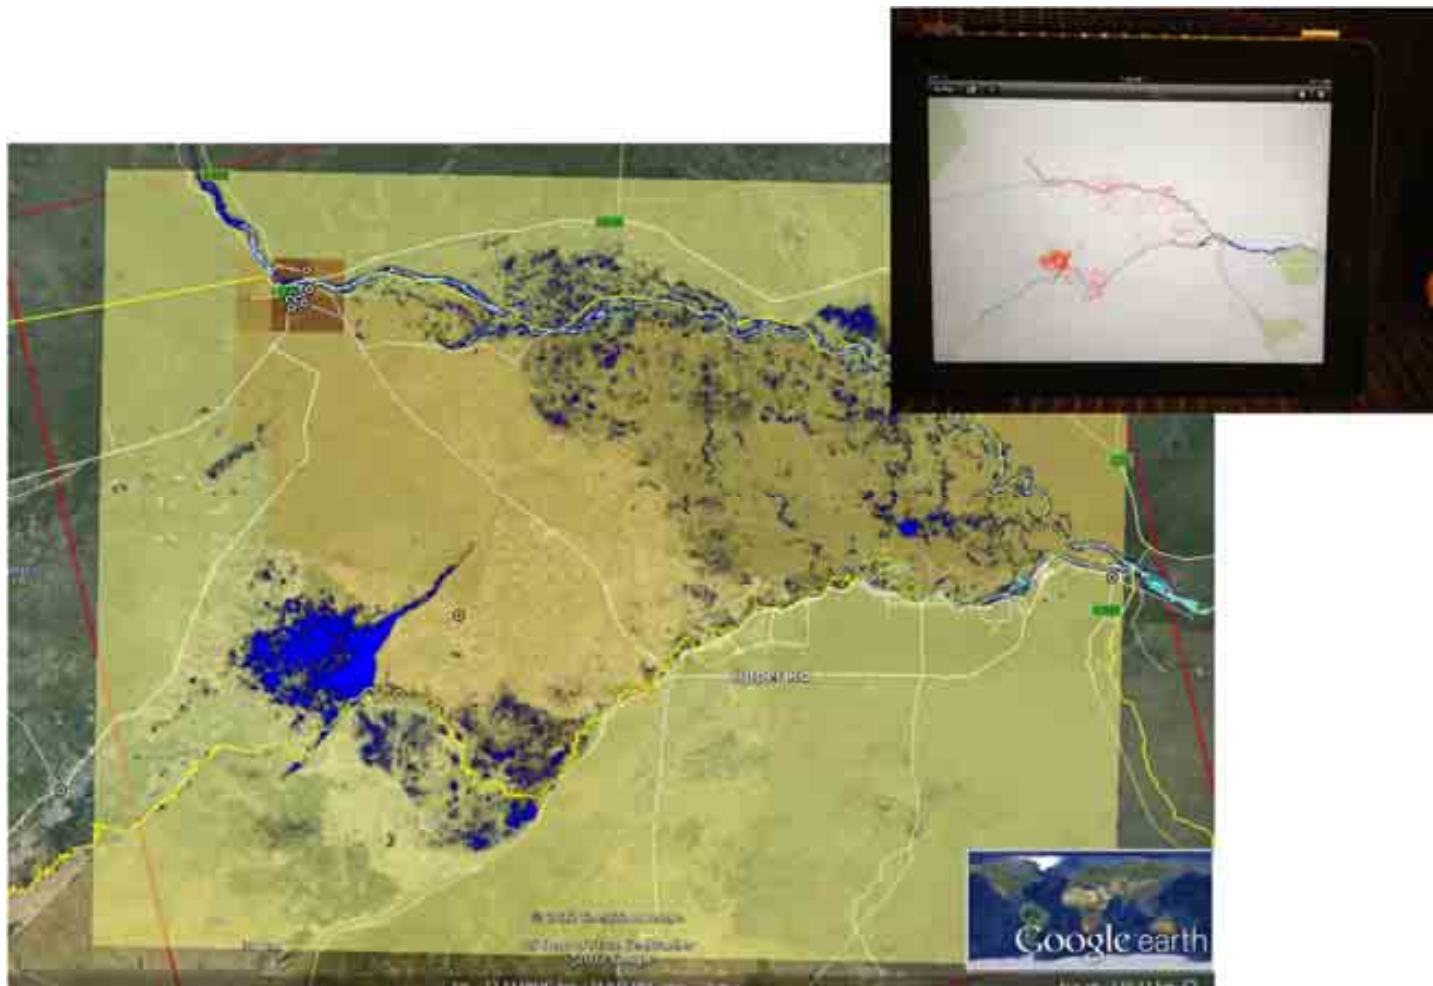

Radarsat data processed in cloud and displayed on Ipad for field work and in preparation for Waterpedia with crowdsourcing



Sample Approach to Hydrological Model Desired By Namibian Hydrological Services

EXAMPLE · HYDROLOGICAL · MODELING · SCHEMATIC · FOR · KAVANGO · BASIN

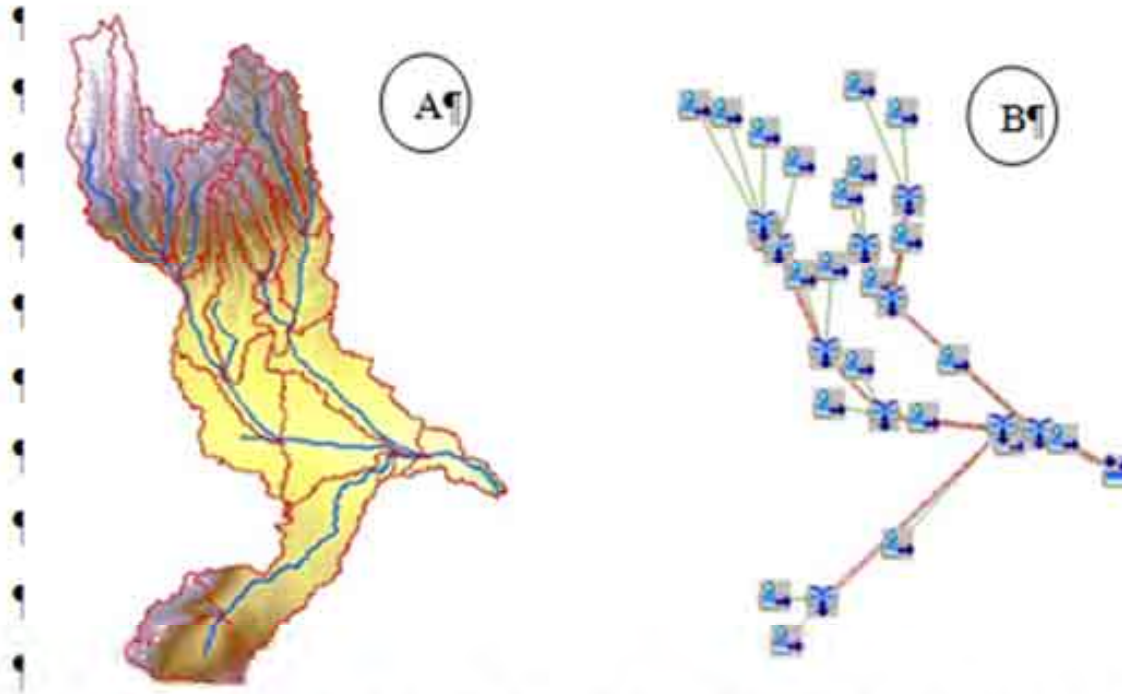


Figure 4b is an illustration of schematizing of the catchment into a series of runoff-catchment and routing reaches used by HEC-GEO-HMS. Precipitation, soil, slope and other sub-catchment specific data will be collected to develop parameters for the rainfall-runoff and reach routing aspects of the model. Observed hydrographs will be used to calibrate and validate the model.



Probability of Flooding (Univ. of Oklahoma, Zac Flamig)

